

tinenza

porcelux

características técnicas porcelux

GRUPO Bia (GL) Absorción de agua < 0,5%
GROUP Bia (GL) Water absorption < 0,5%
GROUPE Bia (GL) Absorption d'eau < 0,5%

**NORMAS DE ENSAYO
STANDARD
NORMES D'ESSAI**

**VALORES PRESCRITOS NORMA EN 14411
VALUE REQUIRED BY EN 14411 STANDARD
VALEURS PRESCRITES NORME EN 14411**

**VALOR MEDIO
AVERAGE VALUE
VALEUR MOYENNE**





FORMATO	PRECIO	PZ/CJ	KG/CJ	M²/CJ	CJ/PL	KG/PL	M²/PL
90x180	PS-506	1	45,5	1,62	24	1.092	38,88
120x120	PS-460	1	39	1,44	36	1.444	51,84
90x90	PS-269	2	42	1,62	27	1.134	43,74
60x120	PS-290	2	33,2	1,44	30	996	43,2
75x75	PS-226	3	42,8	1,69	30	1.304	50,07

prissmacer
MADE WITH LOVE

AZULEJOS FOSET, S.L.U
CAMINO DEL PALMERAL, 10 APARTADO DE CORREOS 263
POL. IND. EL COLOMER 12200 ONDA (CASTELLÓN) ESPAÑA
TEL.: +34 964 500 226 | FAX.: +34 964 500 039
info@prissmacer.es | www.prissmacer.es

tinenza

porcelux

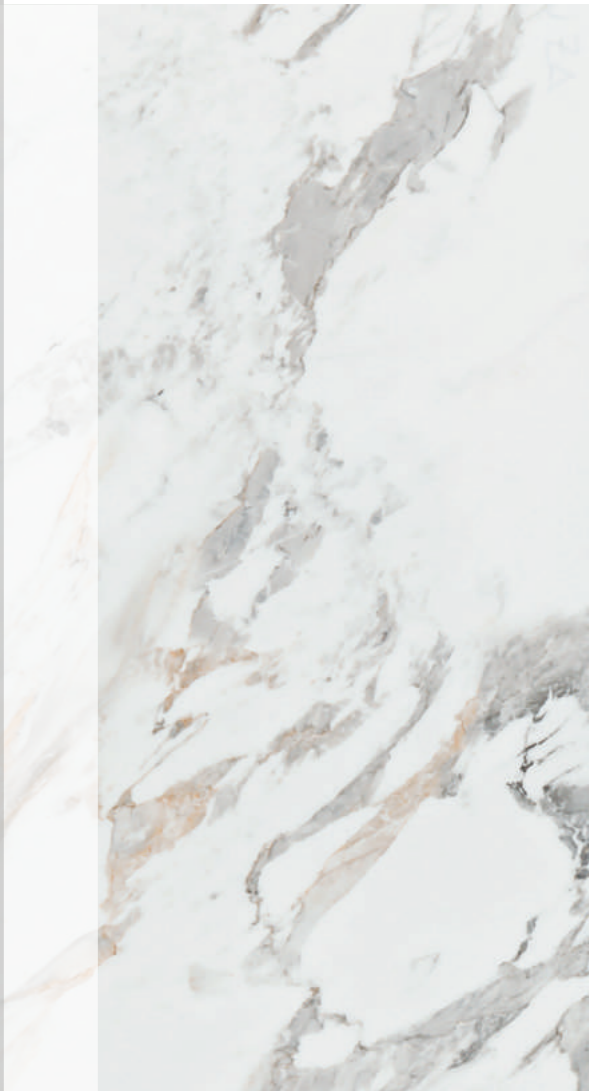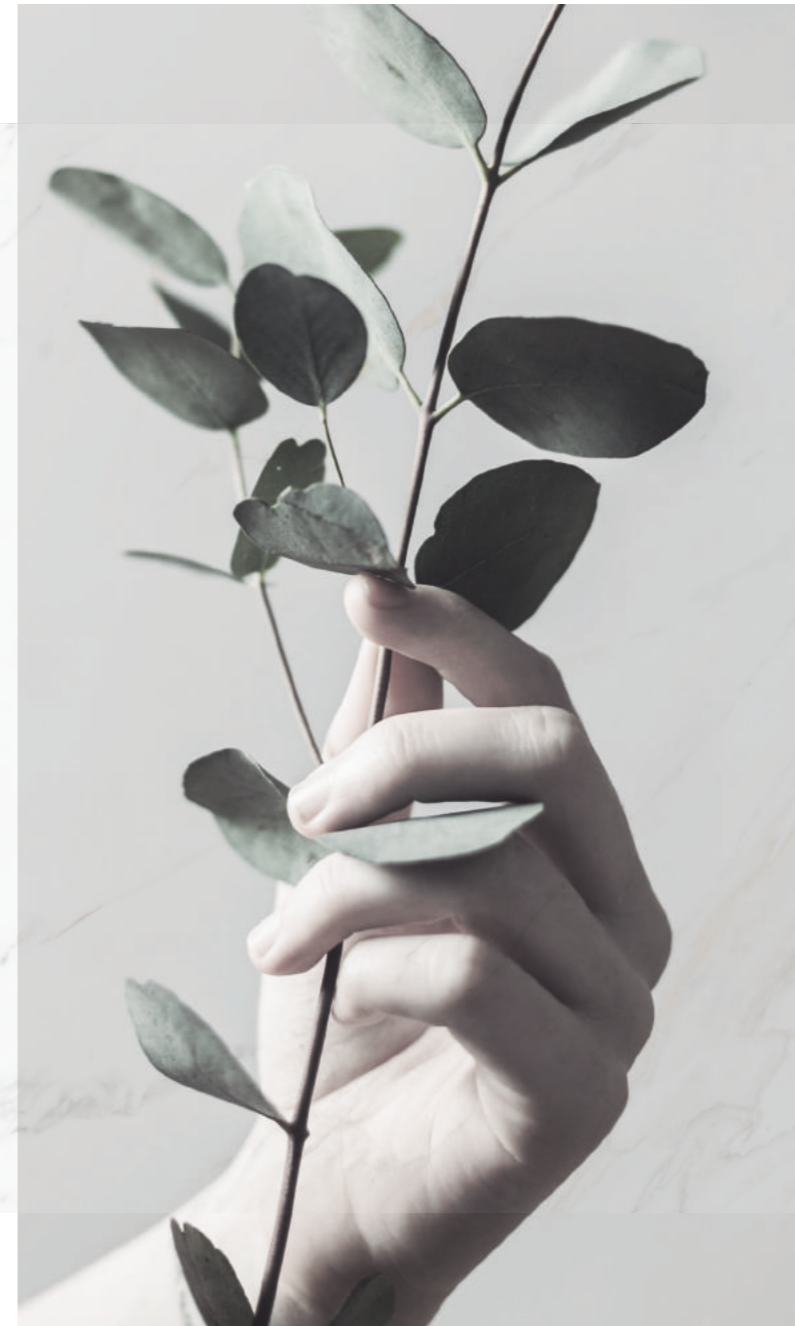

prissmacer



tinenza

porcelux

prismacer



TINENZA

formatos / *formats*



120x120



90x90



75x75



90x180



60x120

