


betonstil

By Terratinta Ceramiche®

A tribute to Scandinavian style. We love it.

 **beton**stif



4	BETONSTIL_the project
10	LIGHT
16	MID


24	WARM
30	DARK
36	HEXA

50	CODES and PACKAGING
52	TECHNICAL FEATURES



BETONSTIL NORDIC STYLE AT ITS BEST.

Light, Mid, Warm, Dark: four colors designed for any indoor space where minimalism, modernity and interior design are the key words. Four modern hues interpreted in our beloved Concrete look. Latest color trends matching with fashion, contemporary style and design: the decorative side of the project is Hexa, from white to pink, from green to blue shades, modern and refined mosaics hues. This is Betonstil. The Scandinavian project par excellence, designed to bring a unique visual appeal to every residential or commercial venue: just #terratintastyle.

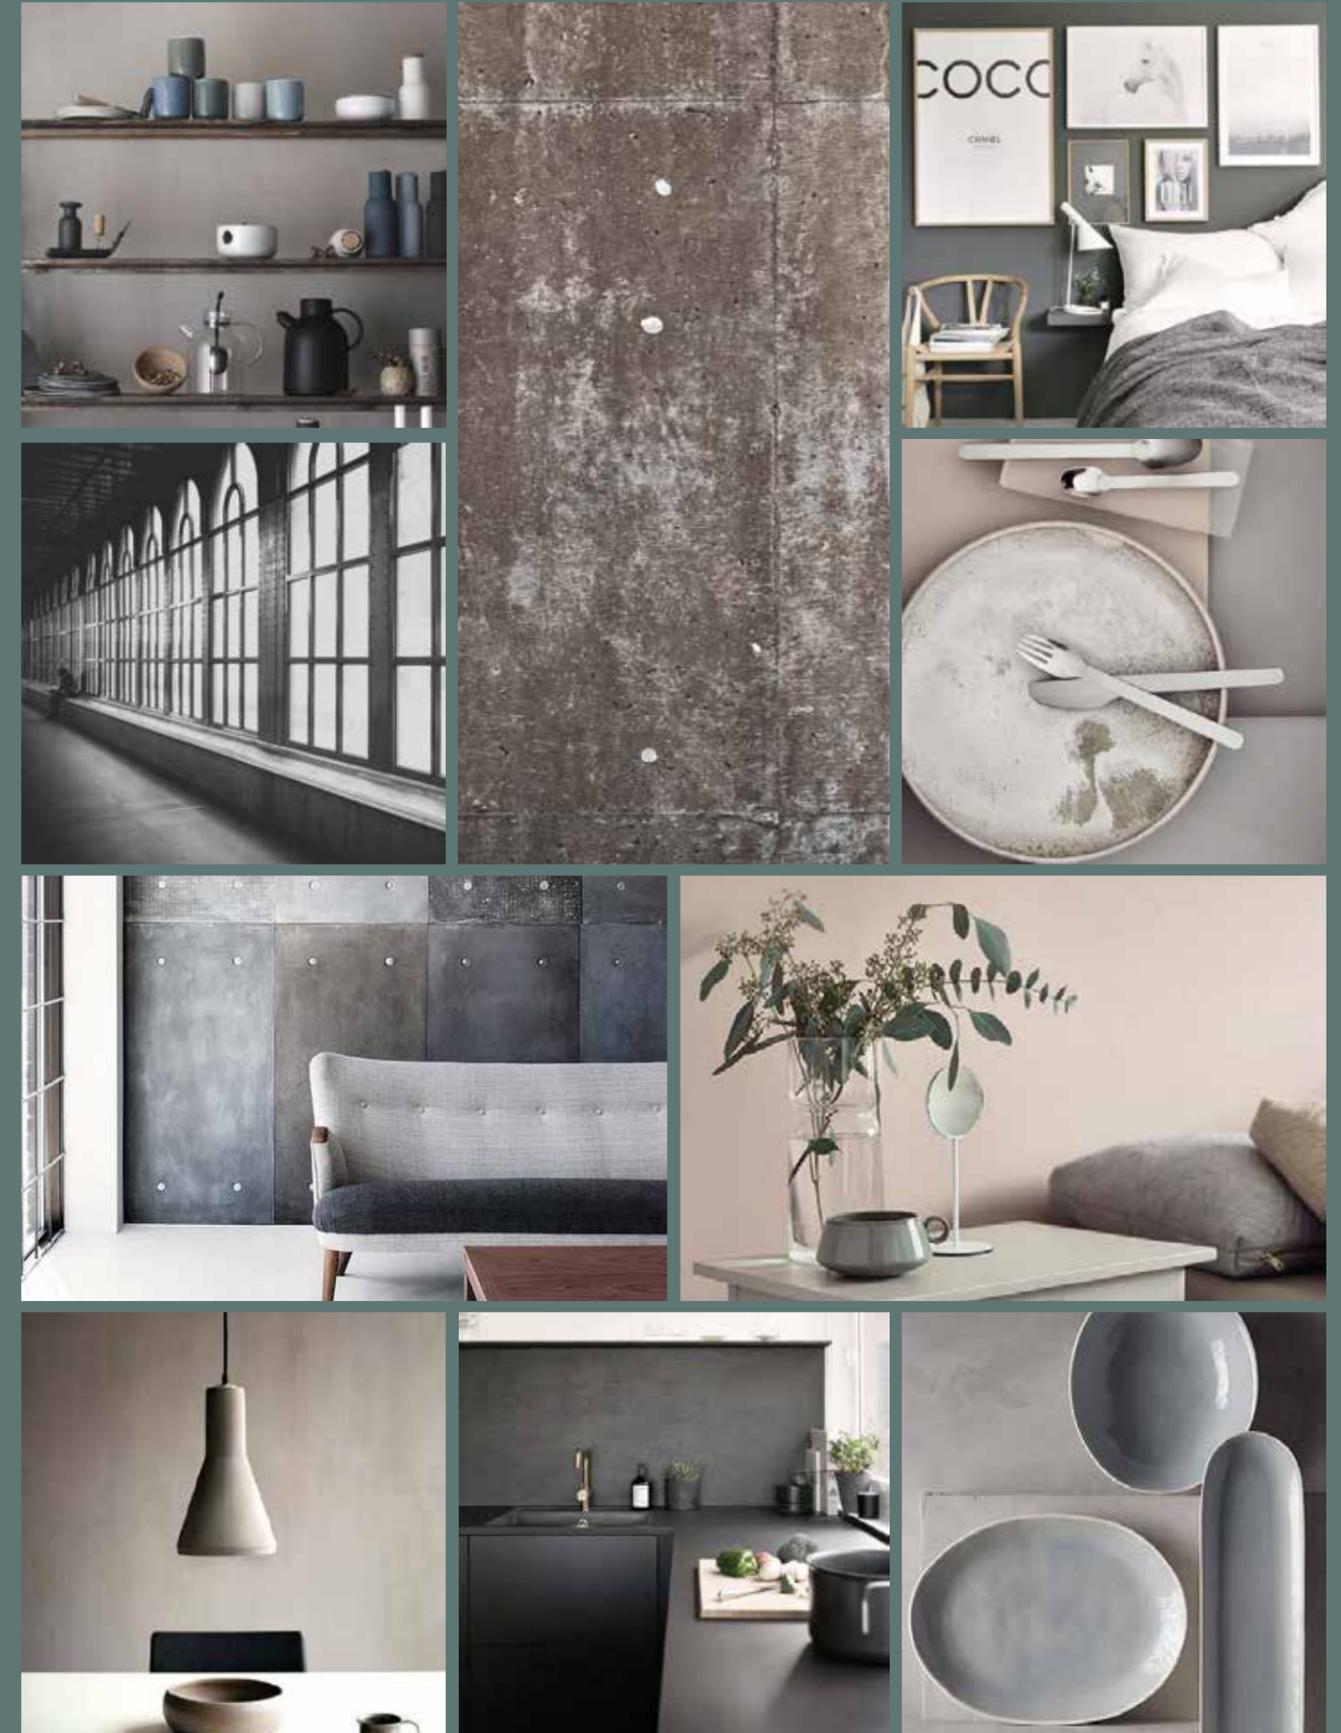

this is it

CONCRETE
cement effect



light



mid



warm




dark

HEXA


hexagonal mosaic sheet size 31,6x31,6



/ cotton candy

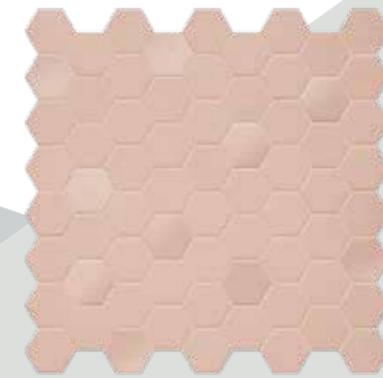

/ rosy blush

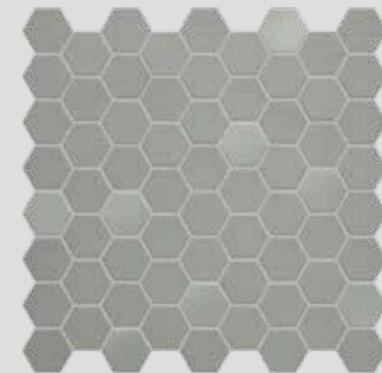


/ wild sage



/ deep navy


| CONCRETE

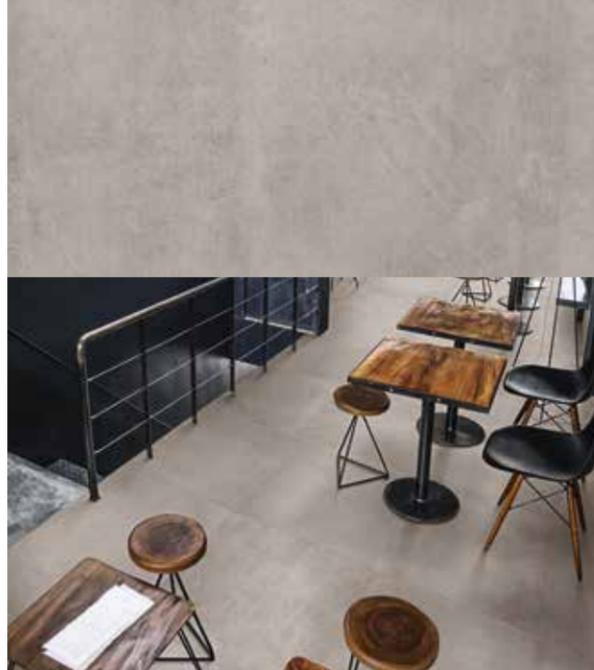

CONCRETE, cement effect with slight shade variation, a versatile and excellent material with the highest technical and aesthetic performances. A new size, 80x80 cm, perfect for big areas where minimalism and contemporary thinking are the perfect choice for any design expression.



LIGHT | concrete

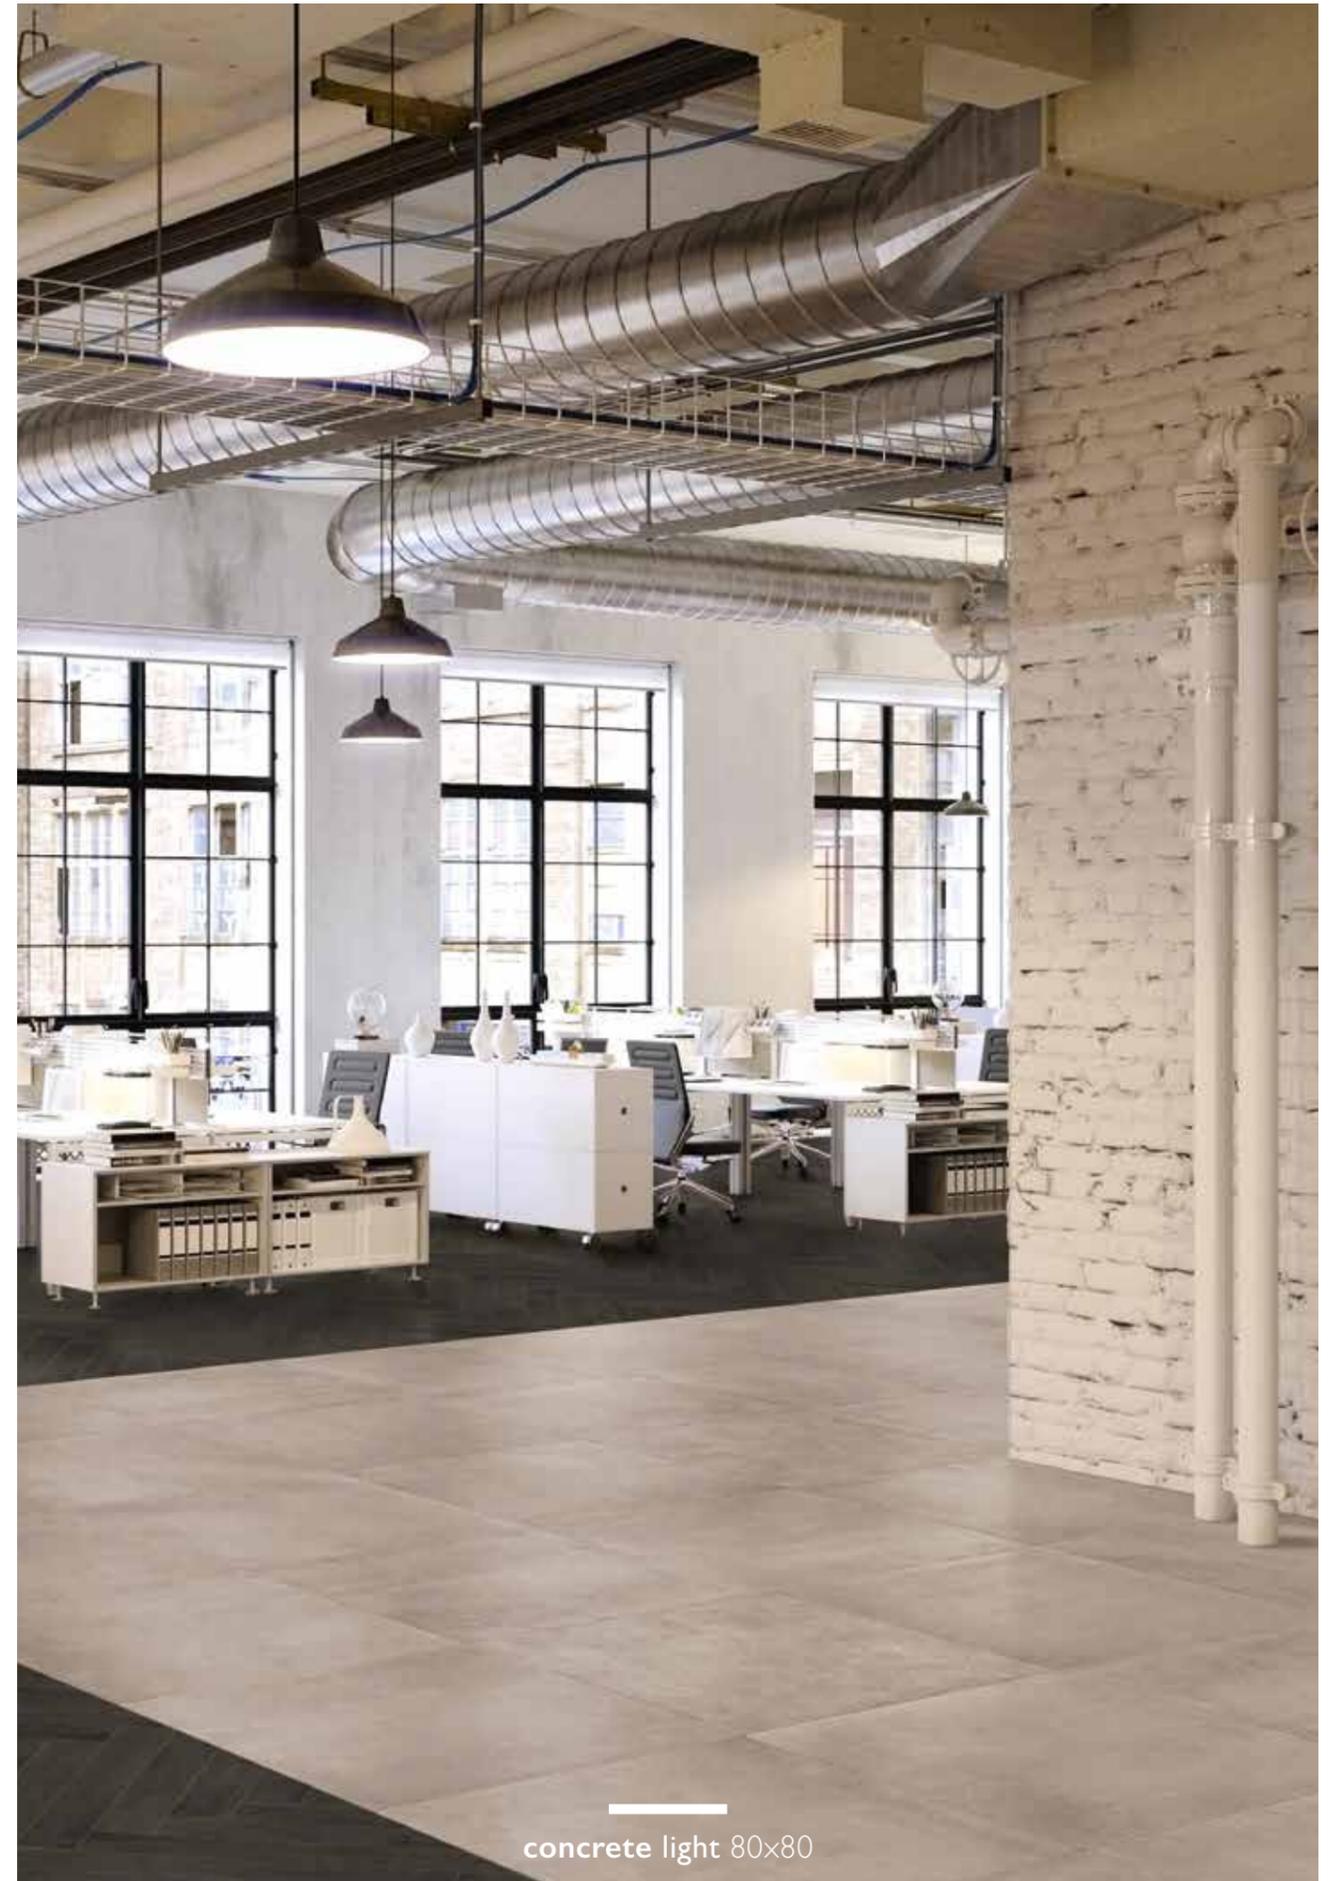

concrete light 80x80



80x80 | 60x60 | 30x60 | 20x60
 10x60 | 30x30 | 20x20 | 10x10
 mosaic 5x5 | mosaic 30x60




± 9,5mm
 ± 11mm (80x80)


MATT
 RECTIFIED

Versatile and excellent material with the highest technical and aesthetic performances



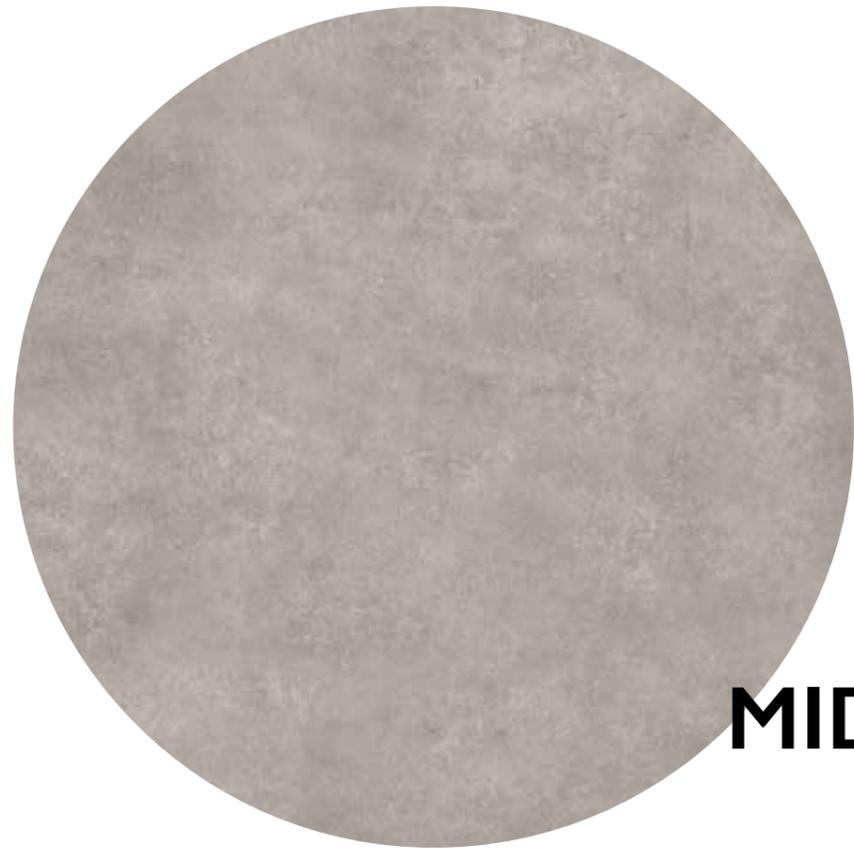


MID | concrete

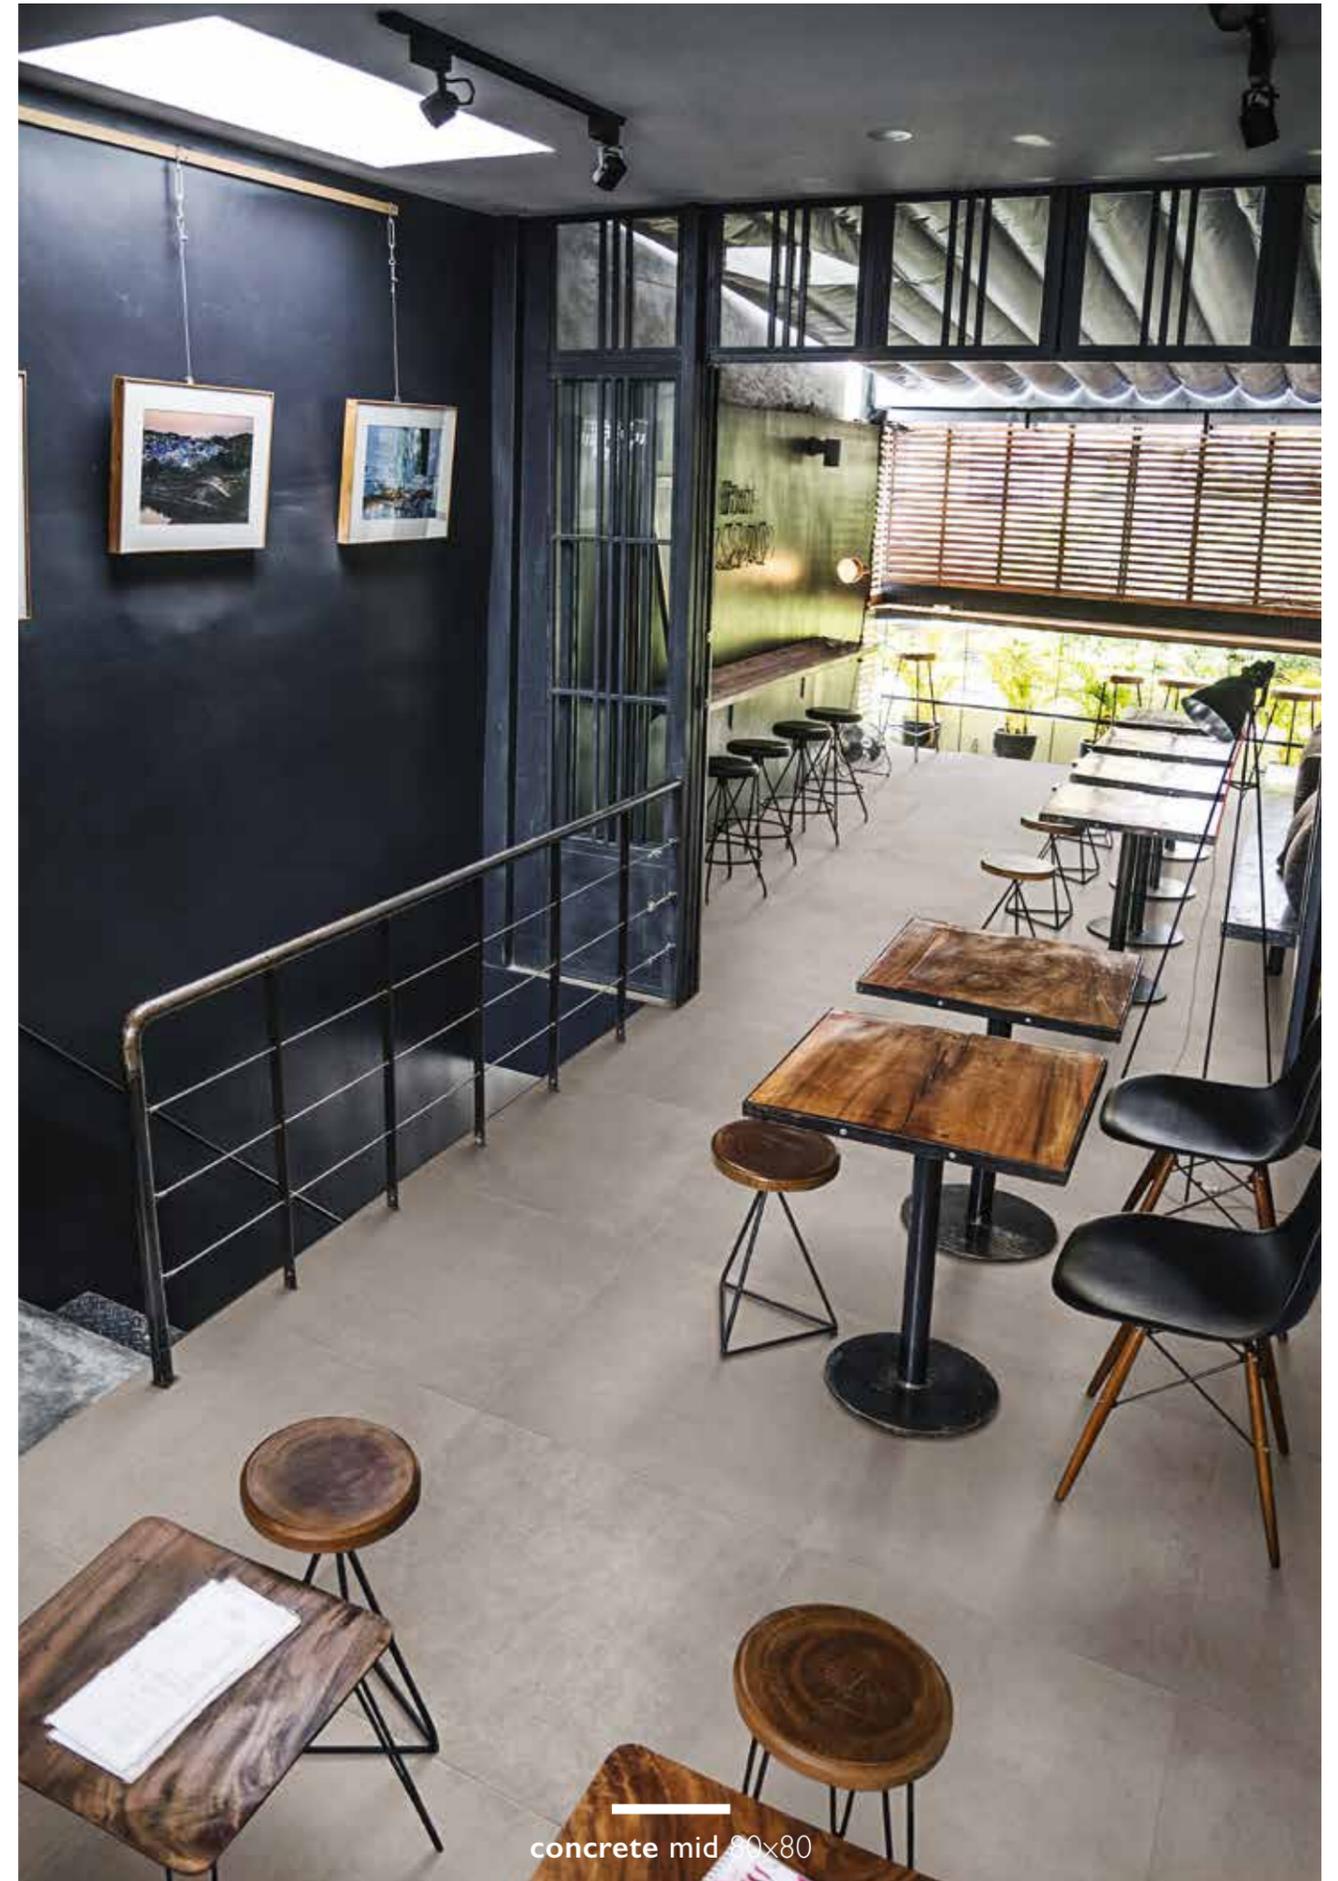


concrete mid 80x80




80x80 | 60x60 | 30x60 | 20x60
10x60 | 30x30 | 20x20 | 10x10
mosaic 5x5 | mosaic 30x60

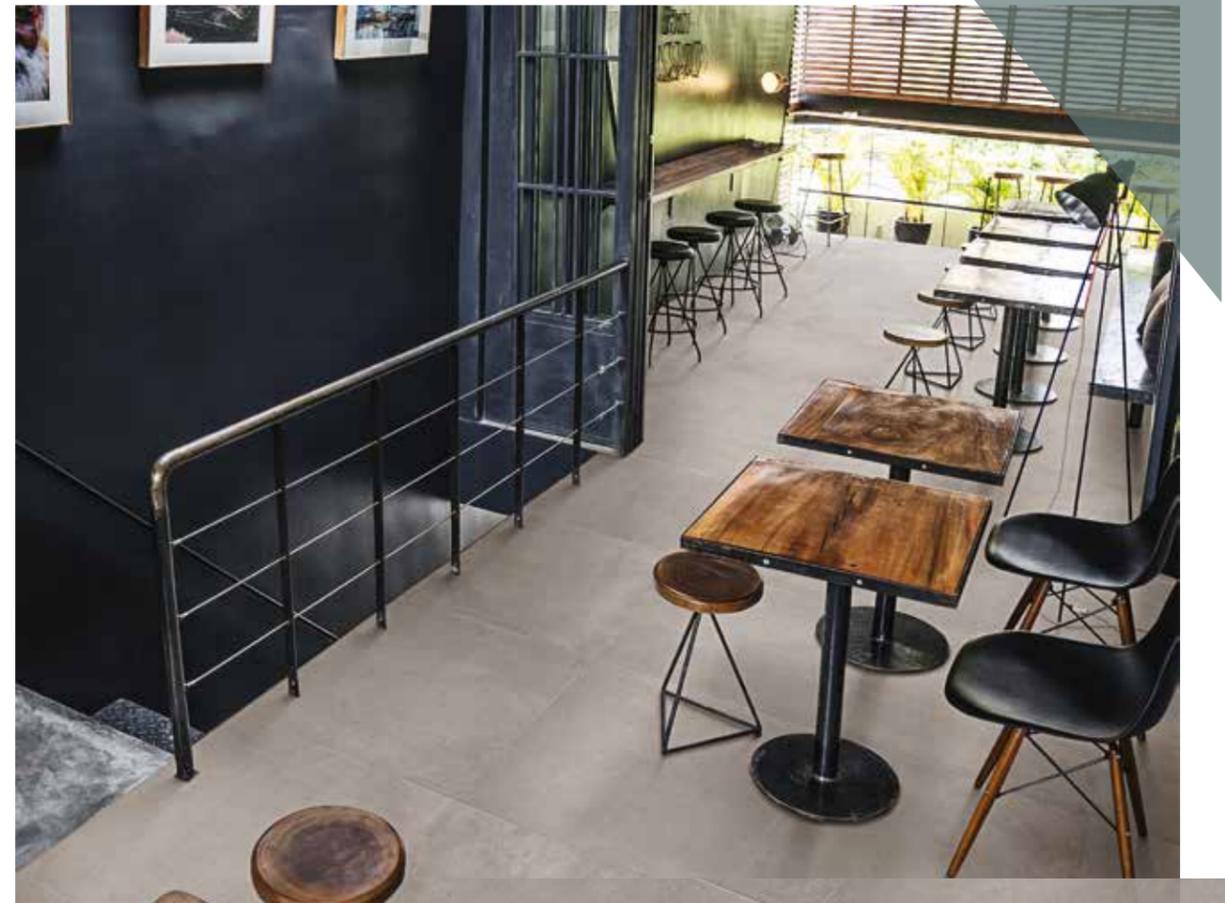

±9,5mm | MATT
±11mm (80x80) | RECTIFIED

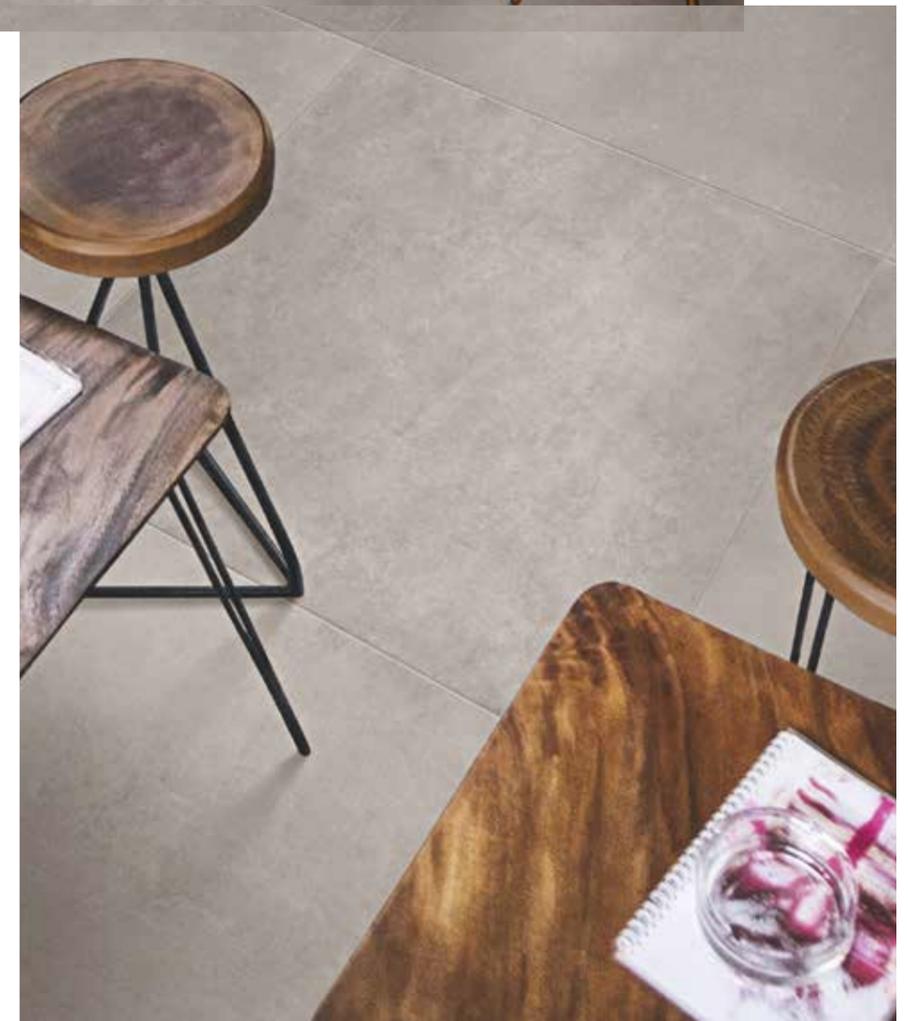


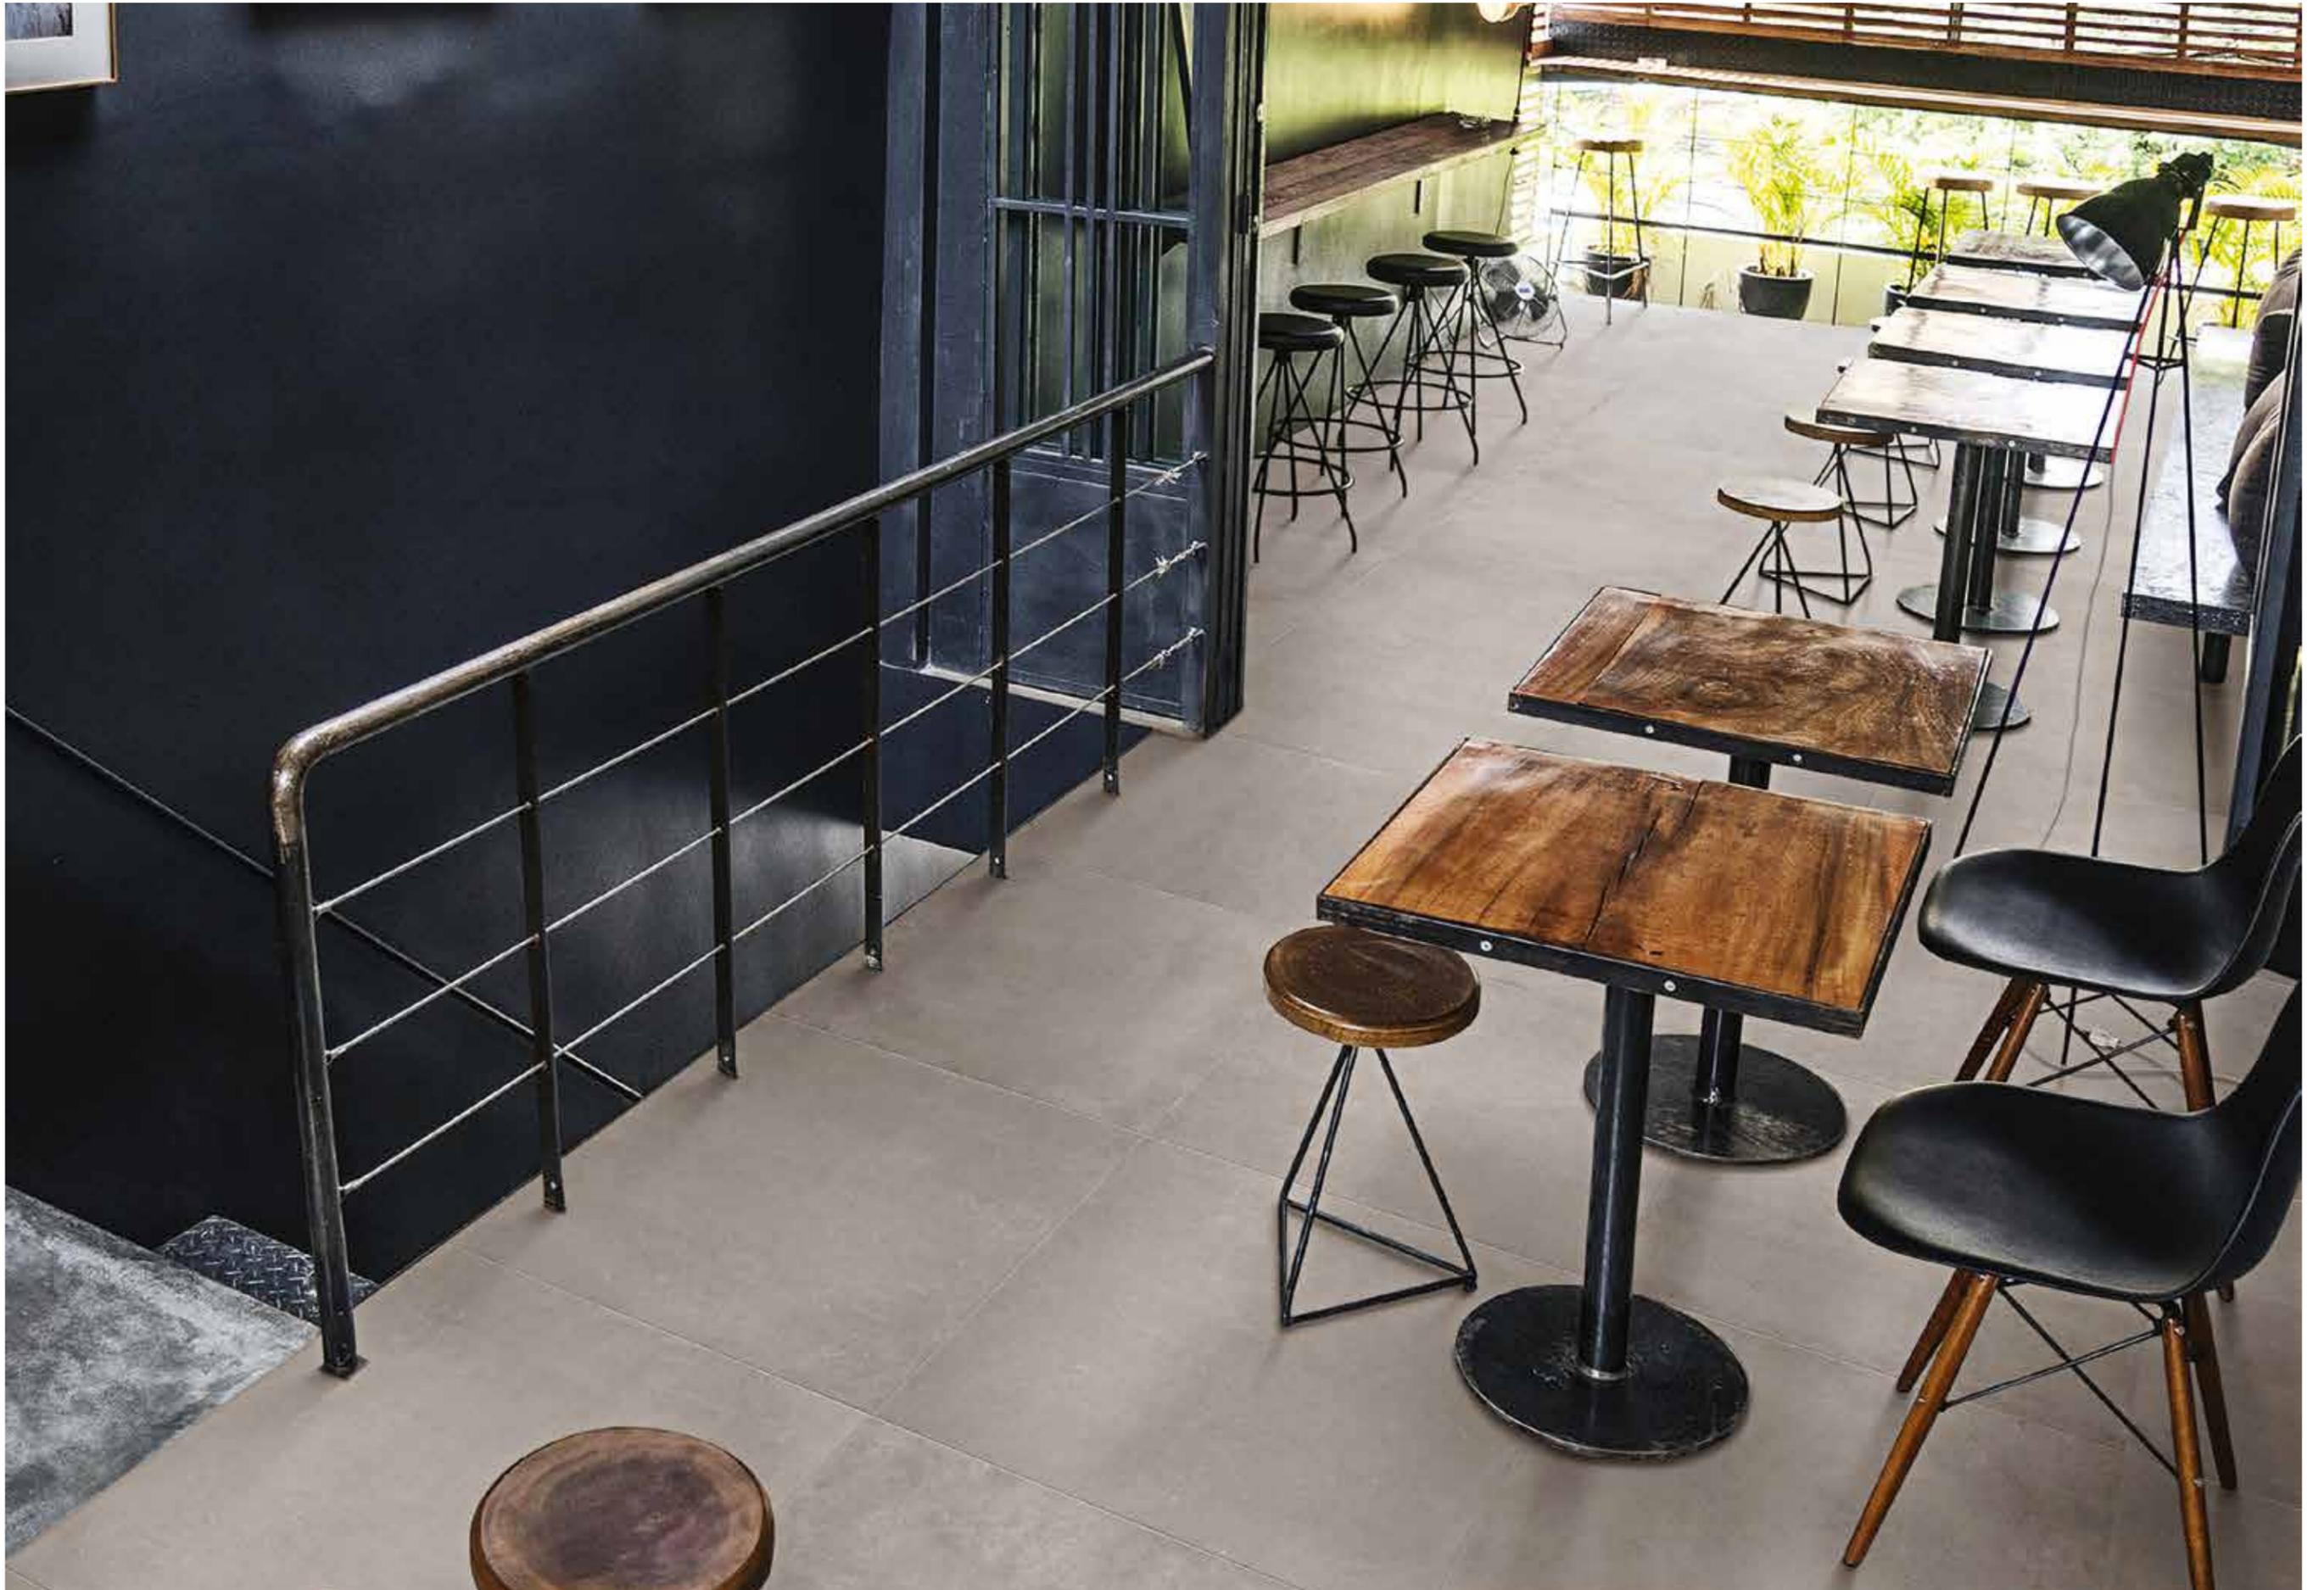




Around here, however, we don't look backwards for very long. We keep moving forward, opening up new doors and doing new things, because we're curious... and curiosity keeps leading us down new paths.

Walt Disney Company

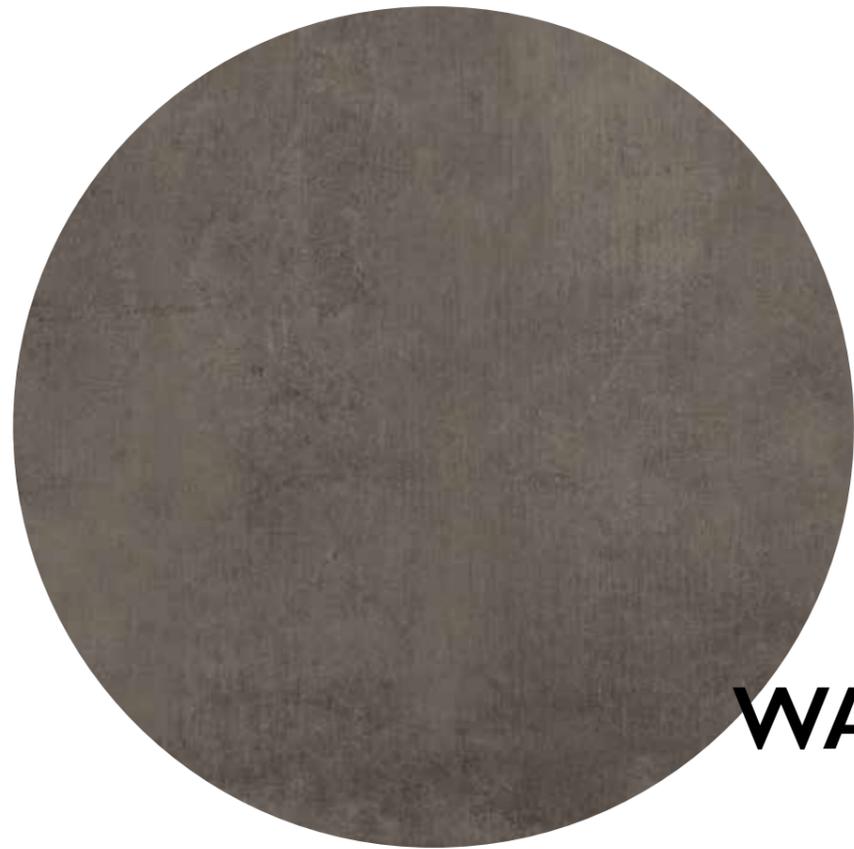

WARM | concrete

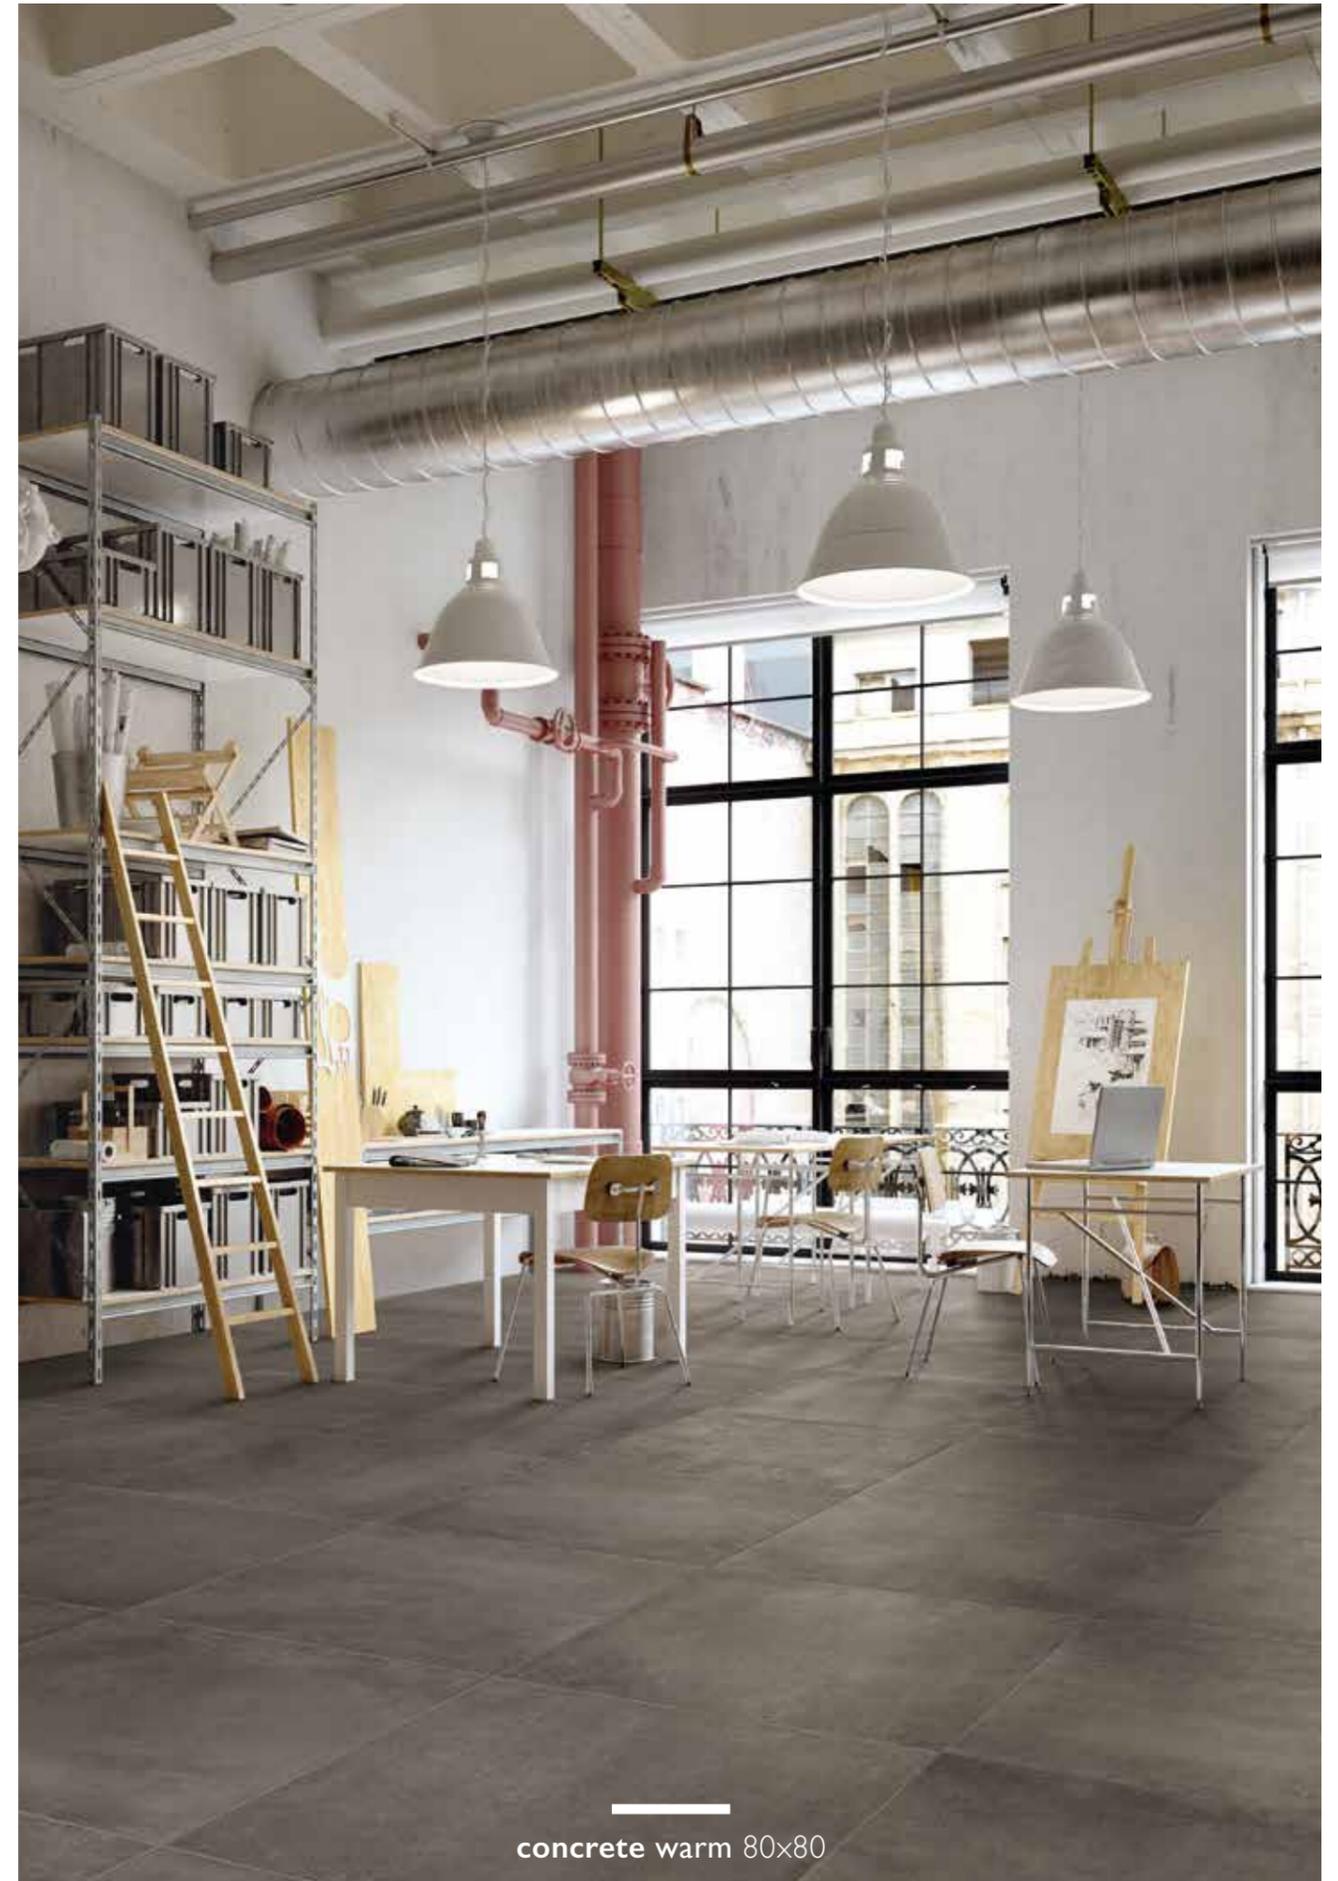

concrete warm 80x80



80x80 | 60x60 | 30x60 | 20x60
10x60 | 30x30 | 20x20 | 10x10
mosaic 5x5 | mosaic 30x60




±9,5mm | MATT
±11mm (80x80) | RECTIFIED




EVERY TIME YOU DO SOMETHING, THINK OF ONE EXTRA THING YOU CAN DO... ESPECIALLY IF OTHER PEOPLE AREN'T DOING THAT EXTRA THING.
SURE, IT'S HARD. BUT THAT'S WHAT WILL MAKE YOU DIFFERENT. AND OVER TIME, THAT'S WHAT WILL MAKE YOU INCREDIBLY SUCCESSFUL.

S. Jobs

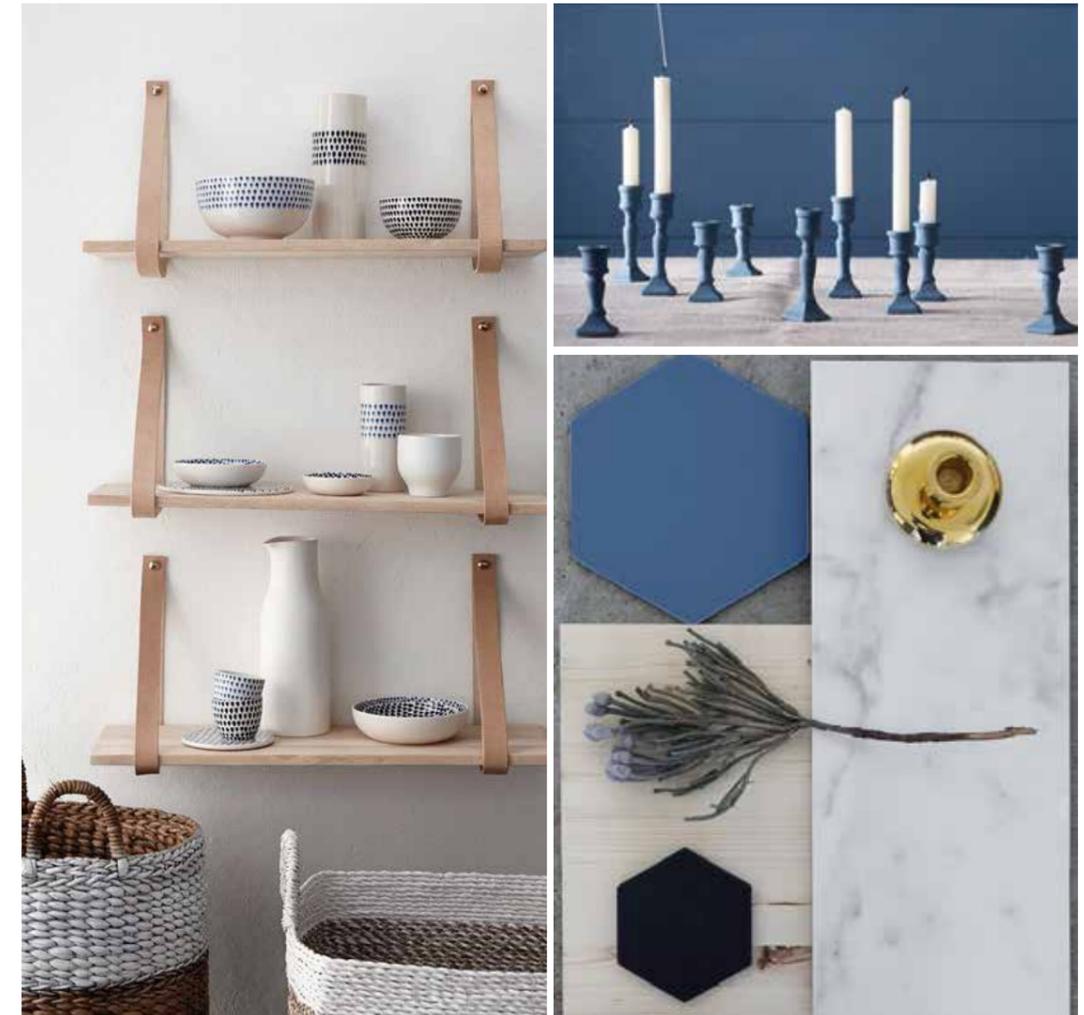



DARK | concrete

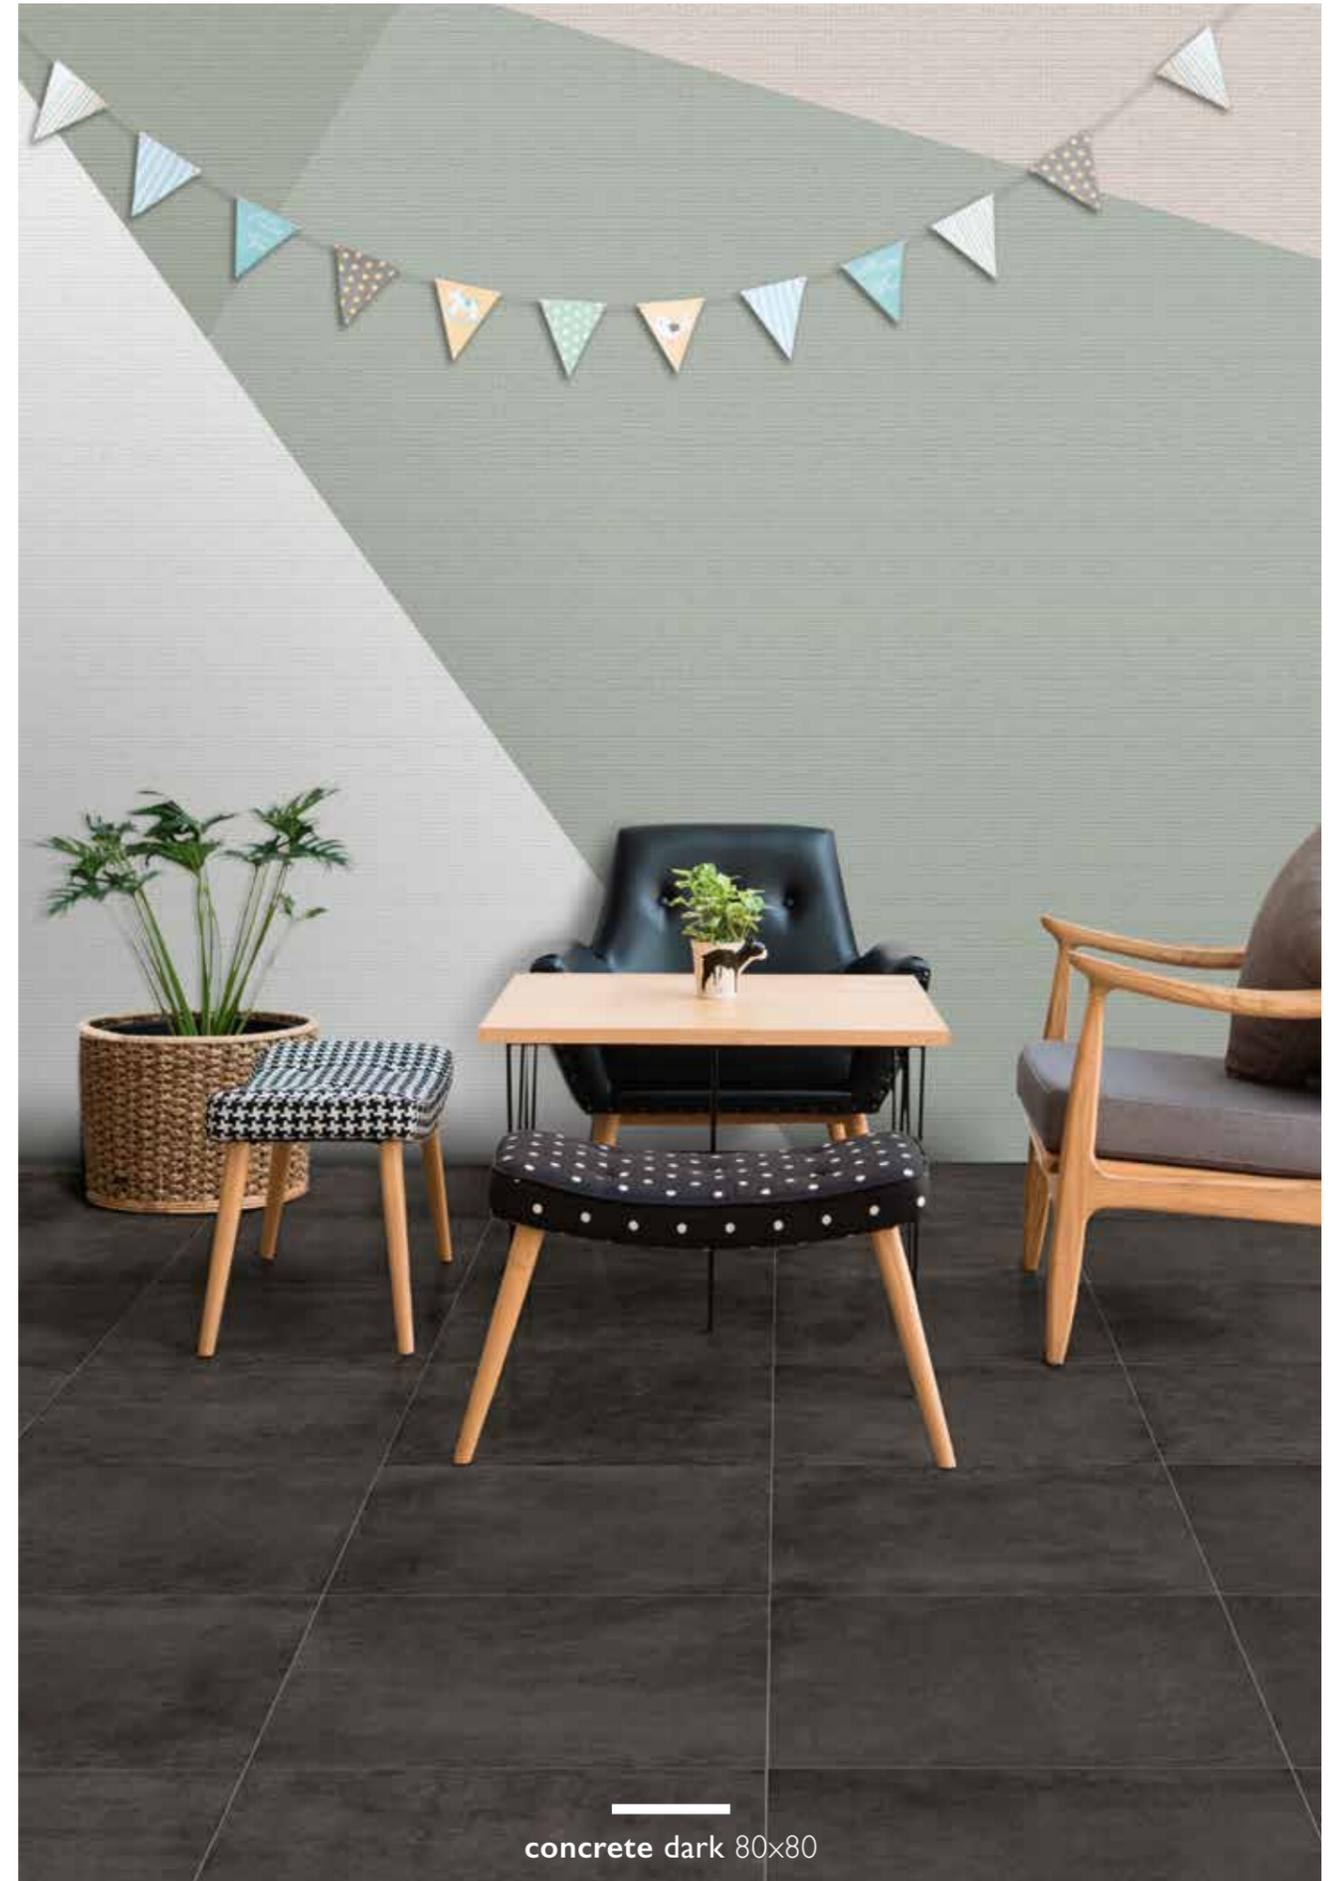

concrete dark 80x80




80x80 | 60x60 | 30x60 | 20x60
10x60 | 30x30 | 20x20 | 10x10
mosaic 5x5 | mosaic 30x60




±9,5mm | MATT
±11mm (80x80) | RECTIFIED





I THINK THAT'S THE SINGLE BEST PIECE OF ADVICE:
CONSTANTLY THINK ABOUT HOW YOU COULD BE
DOING THINGS BETTER AND QUESTIONING YOURSELF.

E. Musk

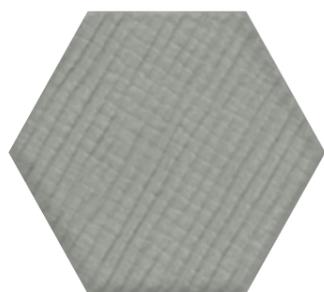

HEXA |

HEXA is something more than just an hexagonal mosaic in 4,3x3,8 cm chips and 31,6x31,6 cm sheets. **HEXA** is pure design. High level technology made in Italy, full body porcelain mosaic, suitable for floors and walls. Available in a mix of three finishes, **matt**, **glossy** (light polished effect) and **fabric** (materic look, like juta texture), is the ultimate design trend: perfect for any residential and commercial area, something following the latest color trends into Scandinavian style. From pure **cotton candy** shade to the darker **deep navy** one, passing through the trendiest **rosy blush** and **wild sage**, **HEXA** mosaic is the answer for the ultimate touch in interior design, and lends itself to many different combinations with Concrete.



cotton candy


mosaic 31,6x31,6 (chip 4,3x3,8cm)

matt, glossy, fabric
finishes mixed together

±4mm



hexa cotton candy mosaic 31,6x31,6_{wall}

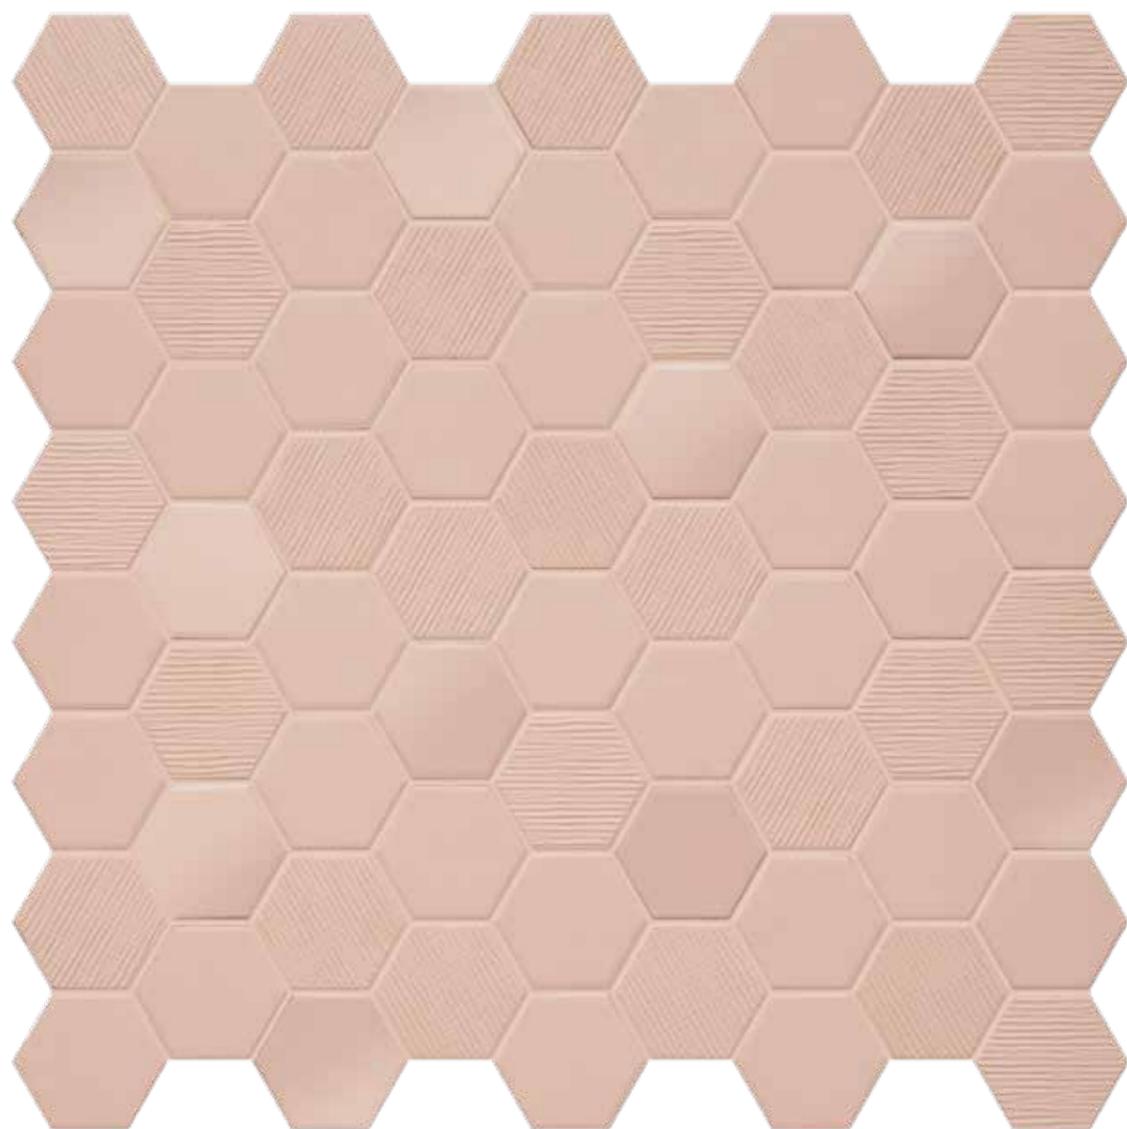

rosy blush


mosaic 31,6x31,6 (chip 4,3x3,8cm)

**matt, glossy, fabric
finishes mixed together**

±4mm



hexa rosy blush mosaic 31,6x31,6_floor
concrete warm 60x60_wall

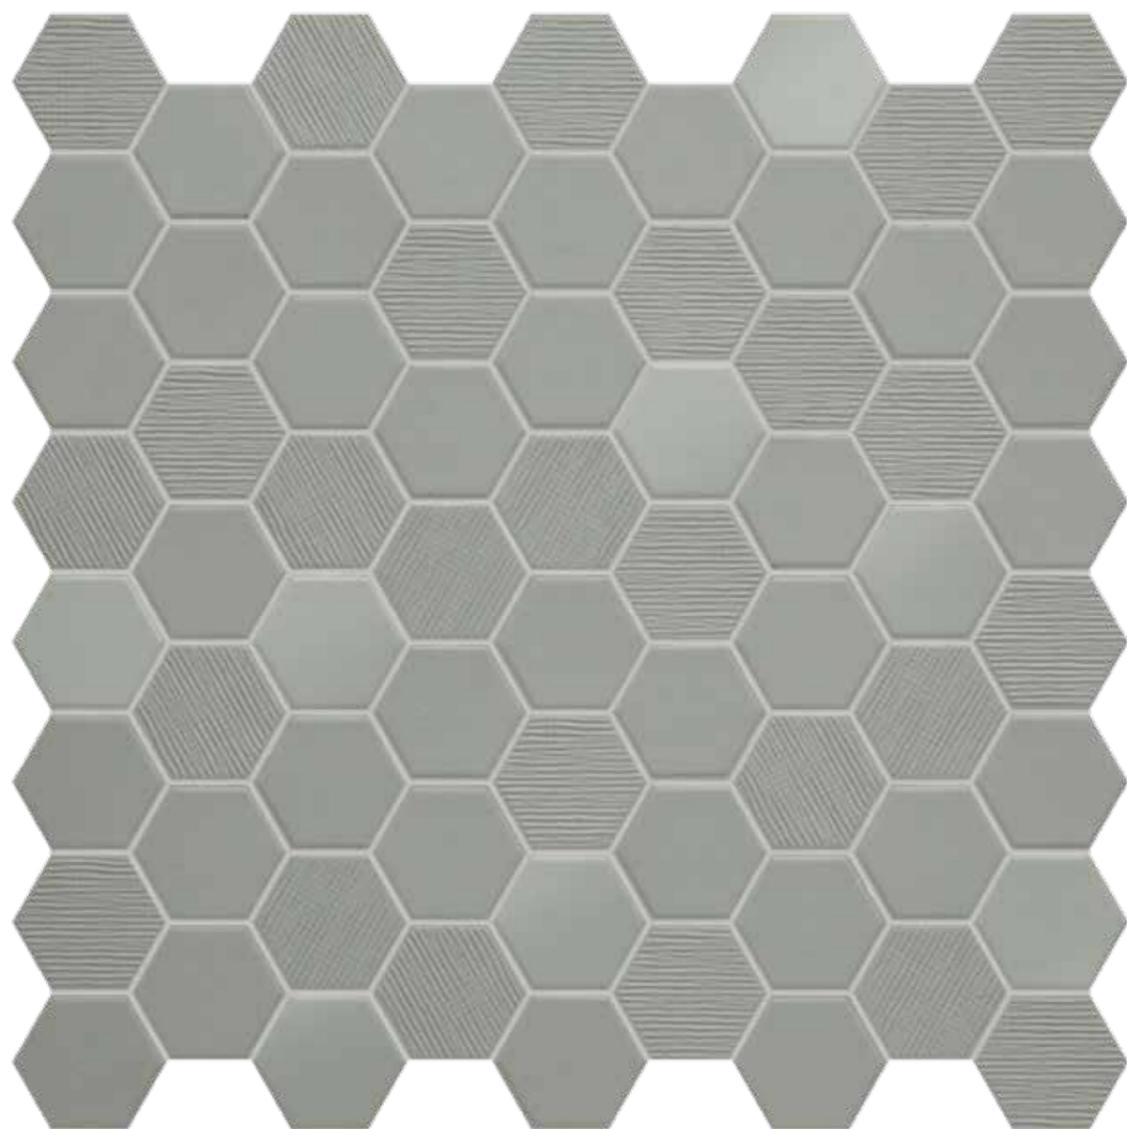


—
wild sage

mosaic 31,6x31,6 (chip 4,3x3,8cm)


matt, glossy, fabric
finishes mixed together

±4mm

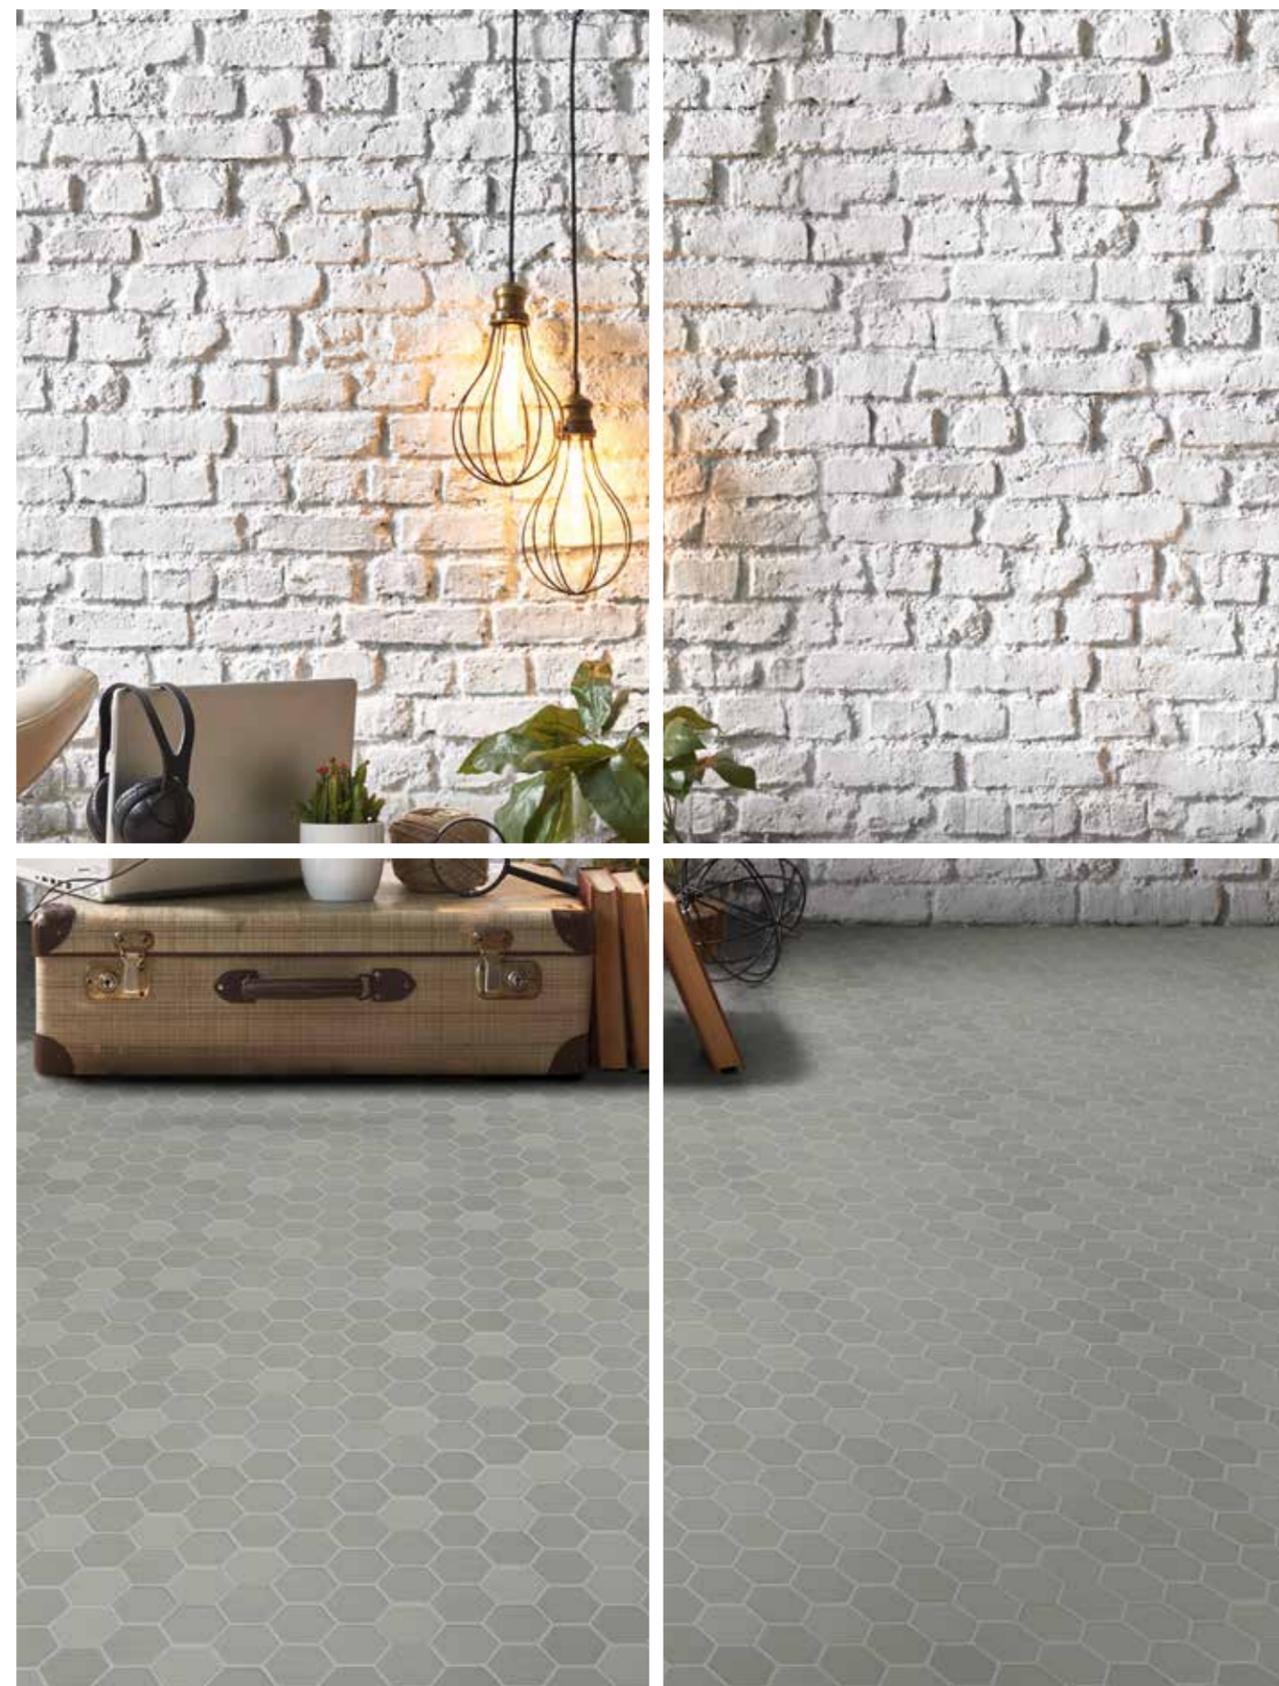

hexa wild sage mosaic 31,6x31,6



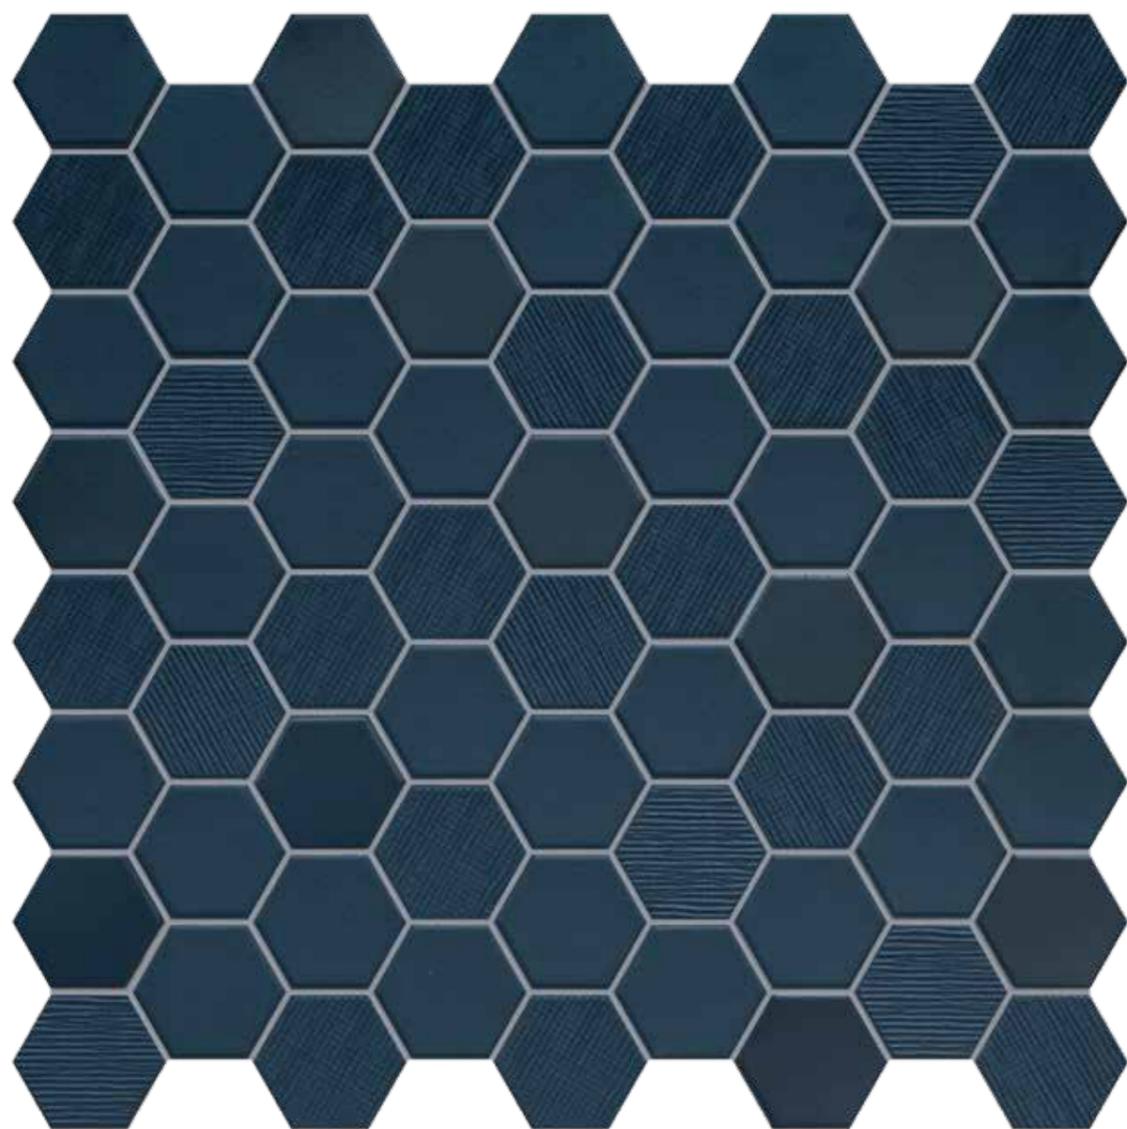


deep navy

mosaic 31,6x31,6 (chip 4,3x3,8cm)

**matt, glossy, fabric
finishes mixed together**

±4mm

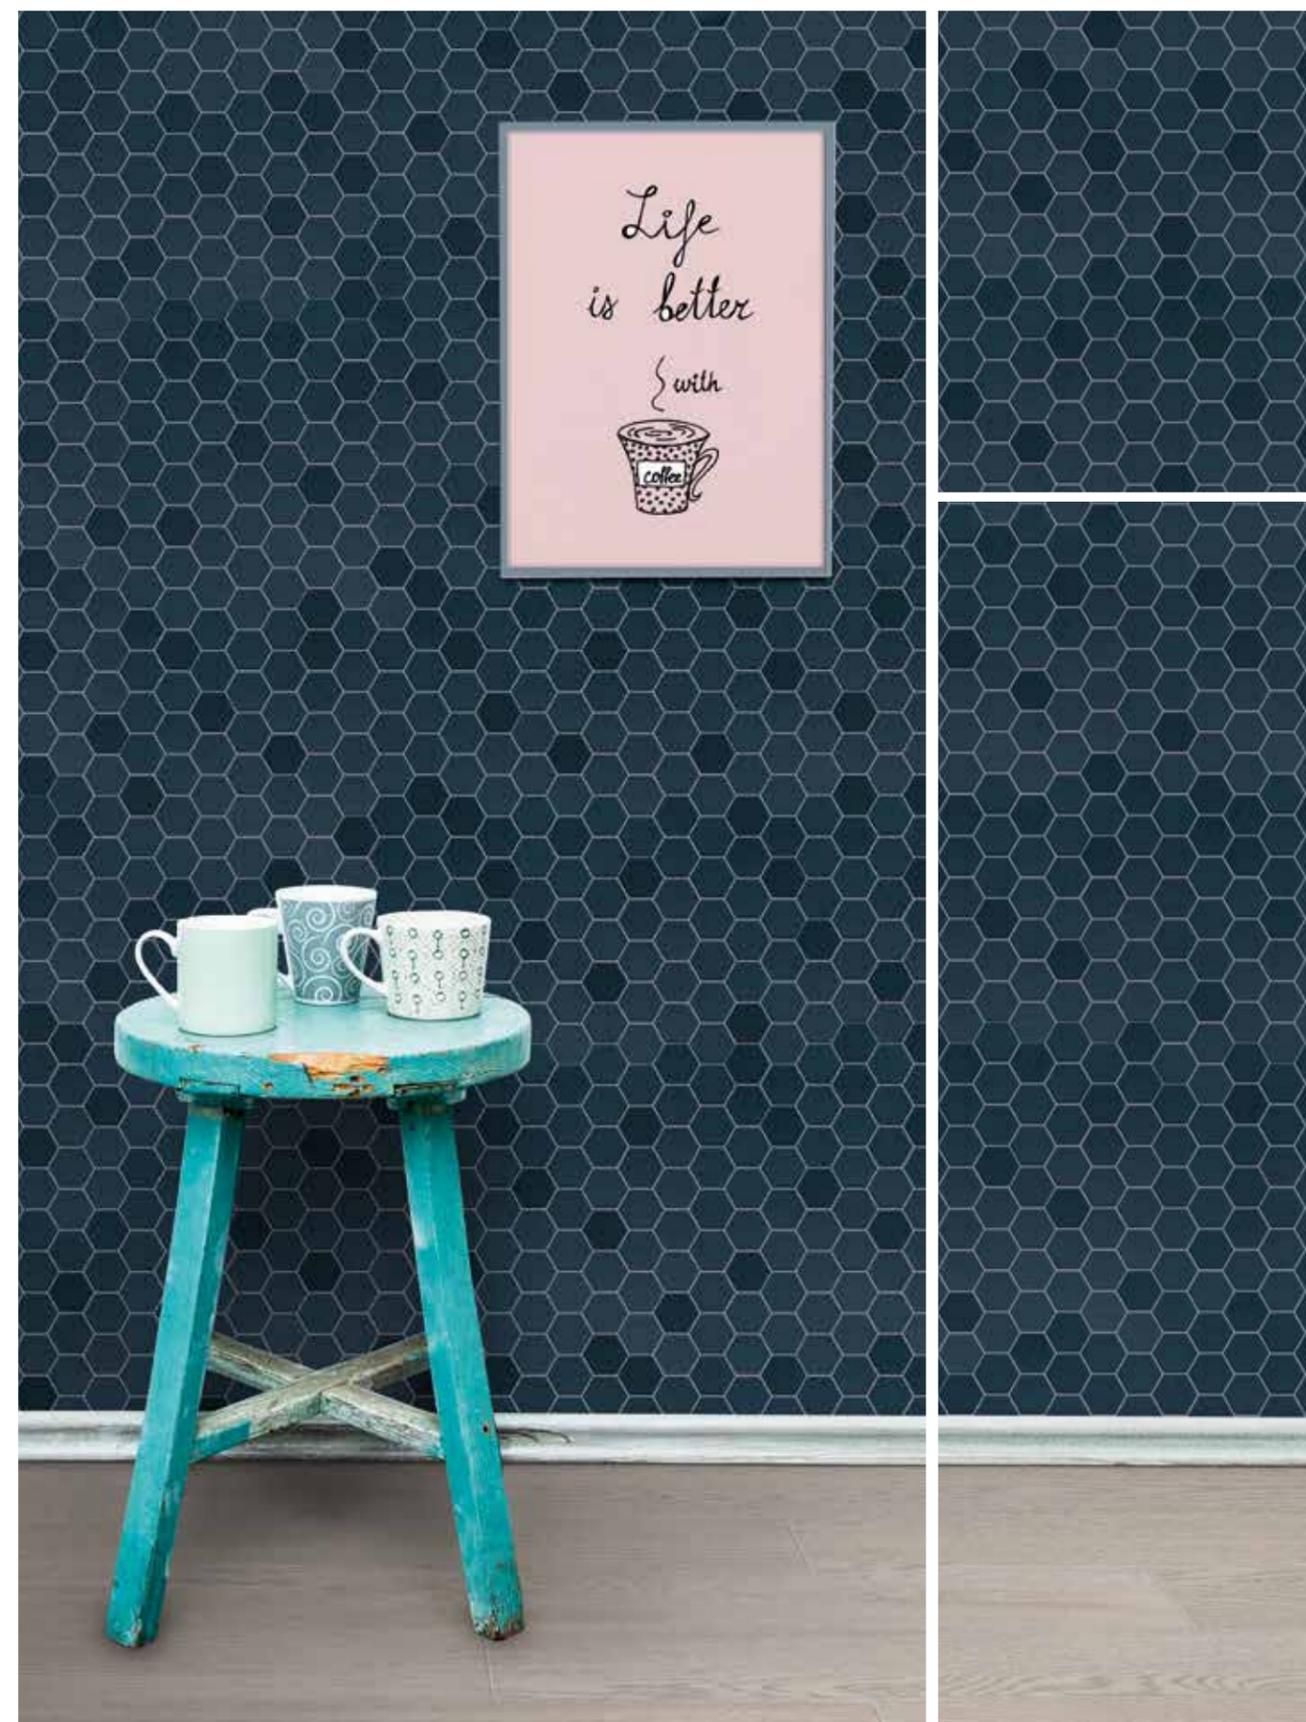

hexa deep navy mosaic 31,6x31,6_wall

MOSAIC HEXA *_advantages*

Full body porcelain mosaic of only 4 mm thickness:
high technical performances and refined aesthetic research.

- wear resistant
- breakage resistant
- frost resistant
- suitable for both floors and walls, even high traffic ones

Chips combined together in 31,6x31,6 cm sheets through the application of "glue dot":

- practical
- easy to handle
- resistant
- suitable for wet areas
- easy to lay down, even onto curved surfaces



hexa cotton candy/rosy blush mosaic 31,6x31,6_wall



TECHNICAL FEATURES CONCRETE

TECHNICAL FEATURES UNGLAZED PORCELAIN STONEWARE
CONFORMING TO EUROPEAN STANDARDS EN 14411 ISO 13006 APP. G (GRUPPO BIA UGL CON E_B ≤ 0,5%)

CARATTERISTICHE TECNICHE GRÉS PORCELLANATO TUTTA MASSA Conformi a Norme Europee EN 14411 ISO 13006 App. G (Gruppo Bia UGL con E_B ≤ 0,5%)
TECHNISCHE EIGENSCHAFTEN FEINSTEINZEUG DURCHGEFÄRBT Gemäß den EUROPÄISCHEN Normen EN 14411 ISO 13006 App. G (Gruppo Bia UGL con E_B ≤ 0,5%)
CARACTERISTIQUES TECHNIQUES GRÉS CÉRAME FIN NON ÉMAILLÉ Conformes aux Normes Européennes EN 14411 ISO 13006 App. G (Gruppo Bia UGL con E_B ≤ 0,5%)

V2
MODERATE

UNGLAZED PORCELAIN STONEWARE

	TECHNICAL FEATURES CARATTERISTICHE TECNICHE TECHNISCHE DATEN CARACTERISTIQUE TECHNIQUE	TESTING METHOD METODICA DI PROVA PRÜFVERFAHREN NORME D'ESSAIS	REFERENCE STANDARD RIFERIMENTO NORMA STANDARDWERT RÉFÉRENCE NORME	TEST RESULTS VALORE PRODOTTO PRODUKT WERTE VALEUR PRODUIT
	Sizes Dimensioni Abmessungen Dimensions	EN ISO 10545-2	N ₂ 15cm • Length and width - Lunghezza e larghezza - Länge und Breite - Longueur et largeur • Thickness - Spessore - Stärke - Epaisseur • Linearity - Rettilinearità spigoli - Kantengeradheit - Rectitude des arêtes • Wedging - Ortogonalità - Rechtwinkligkeit - Orthogonalité • Warpage - Planarità - Ebenförmigkeit - Planéité • Appearance: percentage of acceptable tiles, per lot Aspetto: percentuale di piastrelle accettabili nel lotto Oberflächenbeschaffenheit: Prozentsatz der Fliesen, die den geforderten Eigenschaften entsprechen Aspect: pourcentage de carreaux acceptables sur la fourniture totale	(%) (mm) ±0,6% ±2,0 mm ±0,5 ±0,5 ±0,5 ±2,0 ±0,5 ±2,0 95% min.
	Water absorption Assorbimento d'acqua Wasseraufnahme Absorption d'eau	EN ISO 10545-3	E _B ≤ 0,5%	Compliant Conforme Erfüllt Conforme
	Modulus of rupture Resistenza alla flessione Biegezugfestigkeit Résistance à la flexion	EN ISO 10545-4	Medium value 35 N/mm ² min.	Compliant Conforme Erfüllt Conforme
	Breaking strenght Carico di rottura Bruchlast Charge de rupture	EN ISO 10545-4	sp. > = 7,5 mm: min 1300 N	Compliant Conforme Erfüllt Conforme
	Abrasion resistance Resistenza all'abrasione Abriebbeständigkeit Résistance à l'abrasion	EN ISO 10545-6	175 mm ³ max	Average Medio - Mittelwert - Moyenne < 150 mm ³
	Thermal expansion coefficient Coefficiente di dilatazione termica lineare Wärmeausdehnung Coefficient de dilatation thermique linéaire	EN ISO 10545-8	*Declared value Valore dichiarato Angegebener Wert Valeur déclaré	≤9 MK-1
	Thermal shock resistance Resistenza agli sbalzi termici Temperaturwechselbeständigkeit Résistance aux écarts de température	EN ISO 10545-9	*Pass according to iso 10545-1 Test superato in accordo con iso 10545-1 Test ueberstanden nach ISO 10545-1 Pv en accord avec norme en 10545-1	Resistant Resistente Widerstandsfähig Résistant
	Frost resistance Resistenza al gelo Frostbeständigkeit Résistance au gel	EN ISO 10545-12	*Pass according to iso 10545-1 Test superato in accordo con iso 10545-1 Test ueberstanden nach ISO 10545-1 Pv en accord avec norme en 10545-1	Resistant Resistente Widerstandsfähig Résistant
	Resistance to low concentrations of acids and alkali Resistenza a basse concentrazioni di acidi e alcali Beständigkeit gegen schwach konzentrierten Säuren und Laugen Résistance à des basses concentrations d'acides et bases	EN ISO 10545-13	*Declared value Valore dichiarato Angegebener Wert Valeur déclaré	From ULA to ULB Da ULA a ULB Von ULA bis ULB De ULA jusqu'à ULB
	Resistance to high concentrations of acids and alkali Resistenza ad alte concentrazioni di acidi e alcali Beständigkeit gegen stark konzentrierten Säuren und Laugen Résistance à des hautes concentrations d'acides et bases	EN ISO 10545-13	*Declared value Valore dichiarato Angegebener Wert Valeur déclaré	From UHA to UHB Da UHA a UHB Von UHA bis UHB De UHA jusqu'à UHB
	Resistance to domestic chemicals and additives for swimming pools Resistenza ai prodotti chimici di uso domestico e agli additivi per piscina Beständigkeit gegen chemischen Haushaltsreiniger und Zusatzstoffe für Schwimmbäder Résistance aux prod. chimiques d'usage domestique et additifs pour piscines	EN ISO 10545-13	UB min.	UA
	Stain resistance of unglazed porcelain Resistenza alle macchie di piastrelle non smaltate Fleckenbeständigkeit von unglasierten Fliesen Résistance aux taches des carreaux non émaillés	EN ISO 10545-14	*Declared value Valore dichiarato Angegebener Wert Valeur déclaré	CLASSE 5
	Colors resistance to light Resistenza dei colori alla luce Lichtbeständigkeit Résistance des couleurs a la lumière	DIN 51094	No noticeable color change. Non devono presentare apprezzabili variazioni di colore. Die Muster dürfen keine sichtbaren Farbveränderungen aufweisen. Ne doivent pas présenter de variations importantes des couleurs.	No alteration after testing Materiale inalterato dopo il test. Keine Veränderung nach dem Test. Aucune altération relevée
	Friction coefficient (Slipperiness) Coefficiente di attrito (Scivolosità) Reibungskoeffizient (Schlupfrigkeit) Coefficient de friction (Glissement)	DIN 51130 ANSI A137.1 (DCOF)	*Declared value Valore dichiarato Angegebener Wert Valeur déclaré	R10 >0,42

* It's advisable to refer to Contract Division for all necessary guidelines to a correct use.
Si raccomanda di consultare Contract Division per le indicazioni necessarie al corretto utilizzo.
Zur korrekten Anwendung wird empfohlen mit unserem Contract Division Kontakt aufzunehmen.
Merci de consulter notre Contract Division pour les indications à un usage correct.

TECHNICAL FEATURES HEXA

TECHNICAL FEATURES UNGLAZED PORCELAIN STONEWARE MOSAICS
CONFORMING TO EUROPEAN STANDARDS EN 14411 ISO 13006 APP. G (GRUPPO BIA UGL CON E_B ≤ 0,5%)

CARATTERISTICHE TECNICHE GRÉS PORCELLANATO NON SMALTATO Conformi a Norme Europee EN 14411 ISO 13006 App. G (Gruppo Bia UGL con E_B ≤ 0,5%)
TECHNISCHE EIGENSCHAFTEN UNGLASIERTES FEINSTEINZEUG Gemäß den EUROPÄISCHEN Normen EN 14411 ISO 13006 App. G (Gruppo Bia UGL con E_B ≤ 0,5%)
CARACTERISTIQUES TECHNIQUES GRÉS CÉRAME FIN NON ÉMAILLÉ Conformes aux Normes Européennes EN 14411 ISO 13006 App. G (Gruppo Bia UGL con E_B ≤ 0,5%)

V2
MODERATE

UNGLAZED PORCELAIN MOSAIC
4MM THICK

	TECHNICAL FEATURES CARATTERISTICHE TECNICHE TECHNISCHE DATEN CARACTERISTIQUE TECHNIQUE	TESTING METHOD METODICA DI PROVA PRÜFVERFAHREN NORME D'ESSAIS	REFERENCE STANDARD RIFERIMENTO NORMA STANDARDWERT RÉFÉRENCE NORME	TEST RESULTS VALORE PRODOTTO PRODUKT WERTE VALEUR PRODUIT
	Water absorption Assorbimento d'acqua Wasseraufnahme Absorption d'eau	EN ISO 10545-3	E _B ≤ 0,5%	Compliant Conforme Erfüllt Conforme
	Abrasion resistance Resistenza all'abrasione Abriebbeständigkeit Résistance à l'abrasion	EN ISO 10545-6	175 mm ³ max	Compliant Conforme Erfüllt Conforme
	Thermal expansion coefficient Coefficiente di dilatazione termica lineare Wärmeausdehnung Coefficient de dilatation thermique linéaire	EN ISO 10545-8	*Declared value Valore dichiarato Angegebener Wert Valeur déclaré	≤9 MK-1
	Thermal shock resistance Resistenza agli sbalzi termici Temperaturwechselbeständigkeit Résistance aux écarts de température	EN ISO 10545-9	*Pass according to iso 10545-1 Test superato in accordo con iso 10545-1 Test ueberstanden nach ISO 10545-1 Pv en accord avec norme en 10545-1	Resistant Resistente Widerstandsfähig Résistant
	Frost resistance Resistenza al gelo Frostbeständigkeit Résistance au gel	EN ISO 10545-12	*Pass according to iso 10545-1 Test superato in accordo con iso 10545-1 Test ueberstanden nach ISO 10545-1 Pv en accord avec norme en 10545-1	Resistant Resistente Widerstandsfähig Résistant
	Resistance to low concentrations of acids and alkali Resistenza a basse concentrazioni di acidi e alcali Beständigkeit gegen schwach konzentrierten Säuren und Laugen Résistance à des basses concentrations d'acides et bases	EN ISO 10545-13	*Declared value Valore dichiarato Angegebener Wert Valeur déclaré	From ULA to ULB Da ULA a ULB Von ULA bis ULB De ULA jusqu'à ULB
	Resistance to high concentrations of acids and alkali Resistenza ad alte concentrazioni di acidi e alcali Beständigkeit gegen stark konzentrierten Säuren und Laugen Résistance à des hautes concentrations d'acides et bases	EN ISO 10545-13	*Declared value Valore dichiarato Angegebener Wert Valeur déclaré	From UHA to UHB Da UHA a UHB Von UHA bis UHB De UHA jusqu'à UHB
	Resistance to domestic chemicals and additives for swimming pools Resistenza ai prodotti chimici di uso domestico e agli additivi per piscina Beständigkeit gegen chemischen Haushaltsreiniger und Zusatzstoffe für Schwimmbäder Résistance aux prod. chimiques d'usage domestique et additifs pour piscines	EN ISO 10545-13	UB min.	UA
	Stain resistance of unglazed porcelain Resistenza alle macchie di piastrelle non smaltate Fleckenbeständigkeit von unglasierten Fliesen Résistance aux tâches des carreaux non émaillés	EN ISO 10545-14	*Declared value Valore dichiarato Angegebener Wert Valeur déclaré	CLASSE 5
	Colors resistance to light Resistenza dei colori alla luce Lichtbeständigkeit Résistance des couleurs a la lumière	DIN 51094	No noticeable color change. Non devono presentare apprezzabili variazioni di colore. Die Muster dürfen keine sichtbaren Farbveränderungen aufweisen. Ne doivent pas présenter de variations importantes des couleurs.	No alteration after testing Materiale inalterato dopo il test. Keine Veränderung nach dem Test. Aucune altération relevée
	Friction coefficient (Slipperiness) Coefficiente di attrito (Scivolosità) Reibungskoeffizient (Schlupfrigkeit) Coefficient de friction (Glissement)	DIN 51130 ANSI A137.1 (DCOF)	*Declared value Valore dichiarato Angegebener Wert Valeur déclaré	R10 >0,42

* It's advisable to refer to Contract Division for all necessary guidelines to a correct use.
Si raccomanda di consultare Contract Division per le indicazioni necessarie al corretto utilizzo.
Zur korrekten Anwendung wird empfohlen mit unserem Contract Division Kontakt aufzunehmen.
Merci de consulter notre Contract Division pour les indications à un usage correct.

"Stay hungry, stay foolish."

S. Jobs 1955-2011

CHANGE WE CAN
CHANGE
HABITS
**NOT OUR
PLANET**
BY
TERRATINTA
group



terratinta 100%
ceramiche made in
Italy

#notaclassicstory

brand of Terratinta Group Srl SB

// 45, via Viazza Il Tronco 41042

Fiorano Modenese(MO) Italy

T +39 0536 911408

F +39 0536 1940223

terratintagroup.com

 Terratinta Group

 terratintagroup //

#terratintastyle